



UTOP

Hebei UTOP Technologies Co., Ltd.

VINYL FLOORING, WALL PANELS & ACCESSORIES

Website



www.utopspcfloor.com

Welcome


Room 1006, Financial Building, NO.598
Zhongshan East Road, Shijiazhuang,
Hebei, China.

Contact

Phone/WeChat: +86-17334415995
WhatsApp: +86-17334415995
E-mail: utop@bestspcfloor.com




Content

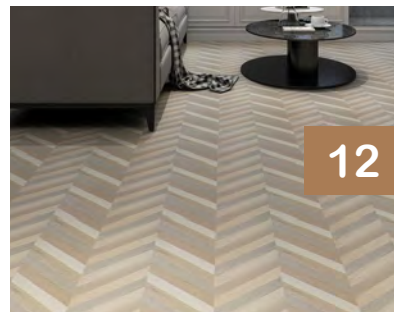

12

SPC FLOORING

WOOD LOOK
STONE LOOK
WOVEN & CARPET LOOK

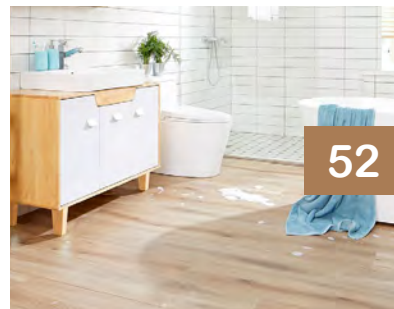

52

LVT FLOORING



66

WALL PANELS

WPC SOLID
WPC HOLLOW
SPC HOLLOW



87

ACCESSORIES

04

ABOUT UTOP

WHY CHOOSE UTOP
ENVIRONMENTAL & CERTIFICATION
OUR CAPACITY
QUALITY CONTROLWHY



ABOUT UTOP

As an up-rising star of SPC flooring producer & supplier, Hebei UTOP Technologies Co., Ltd. is a professional vinyl flooring manufacturer integrating production, research and sales. We are one of the first batch of manufacturer to introduce international advanced SPC production lines.

We have 8 production lines including extrusion lines, UV coating lines, cutting lines, slotting lines, padding lines and packing lines to cover the whole business chain from the beginning to the end. In addition, we have over 200 skillful workers that can run machines smoothly and produce 20,000 square meters per day.

We are keen to developing and researching advanced technologies and launching new products to follow market and industry trends and satisfy more customers' demands. Our products are exported to more than 50 countries and regions, for example, United States, Canada, Australia, Peru, Germany, Malaysia, Vietnam, Thailand, Greece, Colombia, Kenya and India. Welcome to visit us!

Environmental & Certification



ECO-FRIENDLY

All our vinyl flooring products do not contain heavy metals, phthalate, methanol and other harmful substances. It does no harm to human body and the environment. You can move your house as soon as your flooring decoration finished without worrying absorbing harmful VOC substances, thereby having an adverse impact on your health.



INHERENT SAFETY FEATURES

In addition to formaldehyde free, our vinyl flooring products have 100% waterproof properties, NFPA Class B fire rating and R9 slip resistance performance. Its inherent safety features make our products perfectly meet the safety requirements for commercial and residential flooring.



FLOORSCORE CERTIFIED

All our vinyl flooring products are FloorScore certified. FloorScore is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments. Most of us spend as much as 90% of our lives indoors, choosing FloorScore certified flooring means you're choosing a healthy lifestyle for your family.



CE CERTIFIED

All our vinyl flooring products are CE certified. It certifies that our flooring products have met the requirements of Regulation for the Marketing of Construction Products R305/2011 and related standards European harmonized standard EN 14041 in terms of safety, environmental protection, health and consumers protection. All our flooring products are quality assured, you can purchase our products without worries.



PET-FRIENDLY

Pets bring our laughs and fun. They are our families. However, pets also bring troubles to pet owners as their sharp claws always tend to damage the floor surface. Our vinyl flooring products provide superior wear and scratch resistance to allows your pets walking on the floor freely without damaging your floor surface.



EASY CLEANING

Our vinyl flooring products are waterproof and stain resistant. It only requires regular vacuuming or sweeping and occasional mopping. Normal dirt and debris can be easily swept away with a broom. Sticky spots can be easily removed with a wet mop for a more intense clean. It is a great choice for busy householders and shop owners.



Why Choose UTOP?

8

PRODUCTION LINES

8 advanced equipment can reduce production loss and guarantee short production time and timely delivery.

1000+ M²

WORKSHOP

Large workshop guarantees the large output and workshop management running. And it can certify our enterprise strength to serve better for large order customers.

20,000 M²

DAILY CAPACITY

8 advanced equipment can reduce production loss and guarantee short production time and timely delivery.

5

QUALITY INSPECTION

We have strict quality control system to inspect our products before, during and after production.

300+

COLOR RANGES

Our products cover SPC flooring, wall panels and accessories and each have wide ranges options to save your selection and seeking time.

24h

SERVICE

We have more than 20 professional sales representatives to reply your consultation, recommend flooring and quote your inquiries.

100%

CUSTOMER SATISFACTION

We aim to get customers' satisfaction with qualified products, professional support and rapidly trouble removal to eliminate customers' worries

10000

CLASSICAL PROJECTS

Our products have exported to more than 50 countries and gain high reputation from our customers and agents. They certify our quality and popularity.

0

FREE SAMPLE

We can supply free samples for customers to test and accept trial orders. Besides, you can get special discount when you order large orders.

LIMITLESS

We are and will always be continuously improve technology and research new products to serve customer better.

QUALITY CONTROL

Quality determines if the business can survive and succeed. As a result, we attach great importance to product quality and do everything we can to ensure all products we supply are qualified and exceed customers' expectations. To stay afloat, we take the following quality control measures to ensure smooth production and stable product quality.

PRODUCTION PROCESS

We have introduced fully automatic production lines to monitor and control our production process and improve our production efficiency. All production will start with sample. When the sample is tested to be qualified, normal production can start.



1: MIXING



2: EXTRUSION



3: UV COATING



4: CUTTING



5: SLOTTING



6: PADDING (OPTIONAL)





PRODUCTION INSPECTION

During the production, we take several samples from each batch of products and carry out random testing. Typically, our carry out the following inspections and tests to ensure that every batch of products are qualified and in compliance with international standards and customer requirements.

THICKNESS INSPECTION



LENGTH INSPECTION




WIDTH INSPECTION



Peel resistant test



Wear resistance test



Click detection



UV aging test



SPC FLOORING

Short for stone plastic composite, SPC flooring is a new generation of floor covering that combines limestone and stabilizers to create an extremely durable core. It is the most durable waterproof vinyl flooring on the market. It gives a more realistic look and feel of actual wood, stone or ceramic floor and is widely used in a variety of residential and commercial decorations.



Eco Friendly



100% Waterproof



Fireproof



Scratch Resistant



Anti-Slip



Anti-Bacteria



Stain Resistance




Sound Insulation



Warm Underfoot



Easy Cleaning




Easy Installation



Easy Maintenance

SPC FLOORING

STRUCTURE & FUNCTIONS

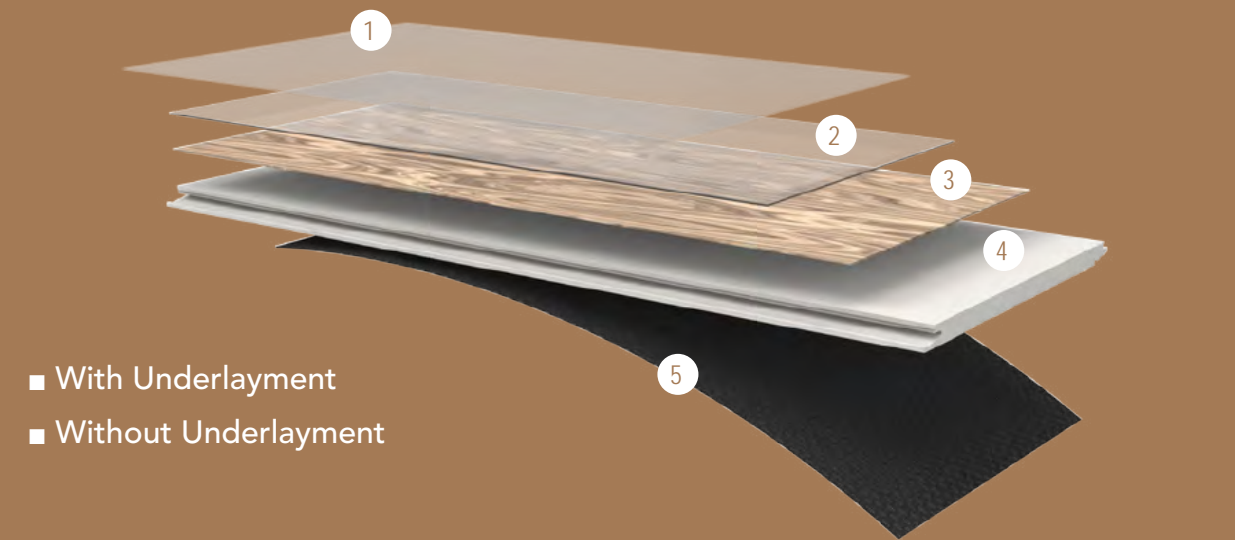

- With Underlayment
- Without Underlayment

- ①

UV Layer

 - Anti-aging
 - Stain resistance
 - Easy to clean
- ②

Wear Resistant Layer

 - Superior wear resistance
 - Decoration layer protection
 - B1 fire retardant
- ③

Decoration Layer


 - Wood/stone/woven/carpet options
 - Variation on colors available
 - Exclusive designs available
- ④

SPC Vinyl Layer

 - 100% waterproof
 - Super stability for lifetime
 - Great for uneven subfloors
- ⑤


Underlayment Layer (optional)

 - IXPE/EVA options
 - Sound resistance
 - Moisture resistance

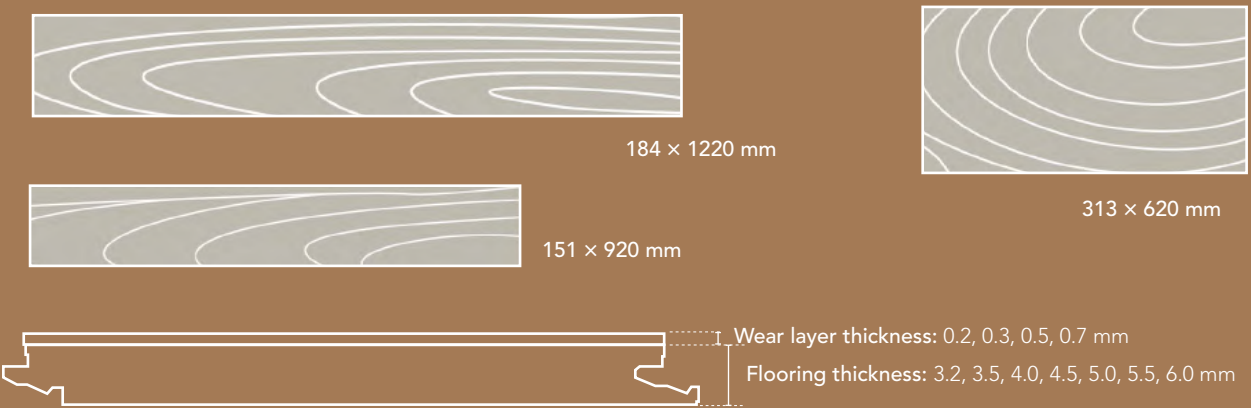

Item	Detection Result	Detection Method	
Dimension	151 × 920 mm; 184 × 1220 mm, 313 × 620 mm	EN 427	✓
Thickness in total	3.2–12 mm	EN 428	✓
Thickness of wear layers	0.1–0.7 mm	EN 429	✓
Weight in total	17.8 kgs/box	EN 430	✓
Peeling strength of layers	Pass	EN 431	✓
Shearing force of layers	Good	EN 432	✓
Residual indentation after static load	Mean value 0.01 mm	EN 433	✓
Dimension stability	Shrinkage ≤ 0.002%; curling ≤ 0.02 mm	EN 434	✓
Flexibility – 10 mm mandrel	No damage	EN 435	✓
Resistance to chemicals	Class zero	EN 423	✓
Bearing a castor chair	No disturbance, no delamination	EN 425	✓
Color fastness to light	≥ 6	ISO 105 B02	✓
Wear resistance	Pass	EN 660	✓
Toxic	Complies	EN 71-3	✓
Resistance to fire	NFPA class B		
Slip resistance	R9		
Performance classification	23, 34, 43		
GB/T4085 PVC block material performance testing		Pass	×
GB 8624 B1 grade flammability testing			
CNS 8907 anti-flaming testing		Pass	×


EDGE TYPE & CATEGORY

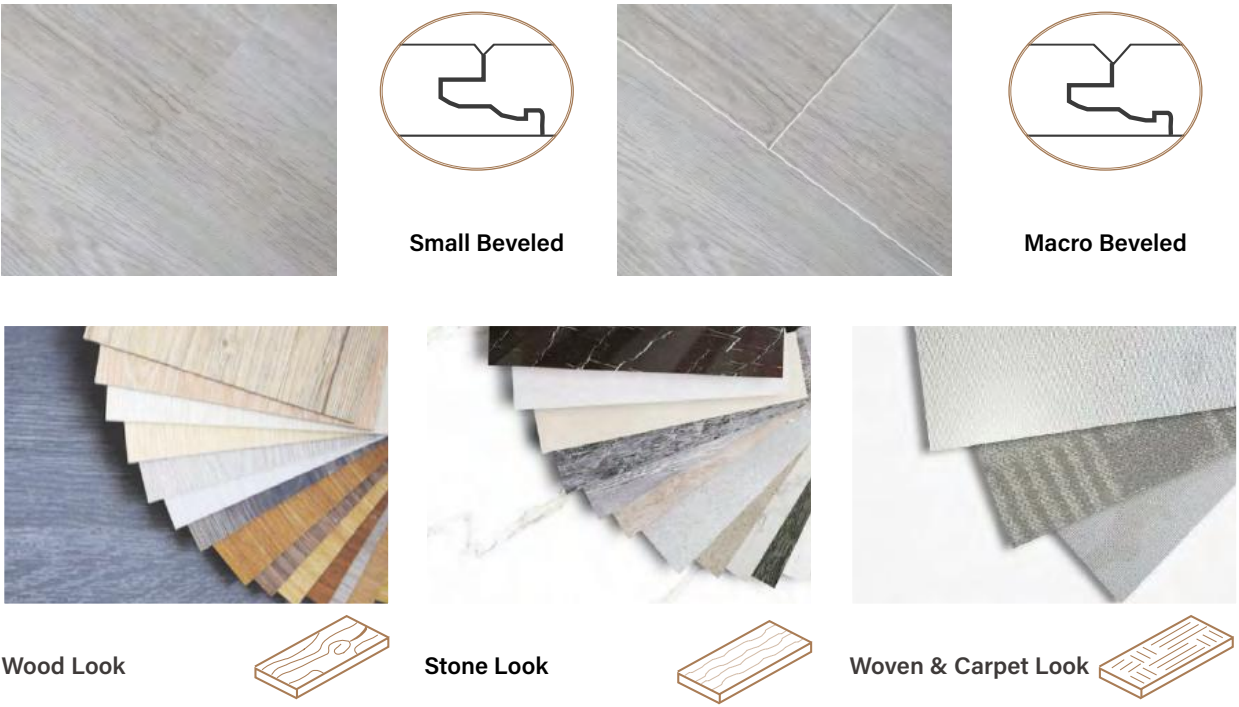



SPC FLOORING WOOD LOOK

Wood look SPC flooring, also known as wood SPC flooring or SPC wood flooring, preserves the look and texture of natural wood while providing better dimensional stability, greater water resistance performance and more comfortable foot feel than real wood flooring.



WOOD LOOK

These realistic wood look design comes in many different colors, patterns and surface treatments. The high definition decoration layer in the SPC flooring allows you enjoying the classic beauty of real wood flooring without worrying about the floor deformation and damage arising from moisture and temperature change.



WOOD LOOK SPC FLOORING

INTEGRATES WOOD BEAUTY & EXCEPTIONAL DURABILITY



EXCEPTIONAL DURABILITY

We offer a 25-year warranty for our residential SPC flooring and a 10-year warranty for our commercial SPC flooring. All our SPC flooring is provided with a wear layer that can withstand about 10,000 wear-resisting revolutions and higher. It ensures our SPC flooring works well in both residential and commercial environments.



STAIN RESISTANCE

SPC flooring surface is covered with a special treated UV layer and wear layer that provide excellent stain resistance performance. Besides, SPC flooring is 100% waterproof and stains can be completely removed with a broom or a wet mop. It helps you saving a lot of time on flooring cleaning.



FLAME RETARDANT

According to the statistics of authoritative departments: 95% of the people injured in the fire is caused by toxic gas generated when burning. The main component of the SPC flooring is natural limestone powder, in case of fire, the SPC flooring has great flame retardant performance and will not produce asphyxiating toxic and harmful gas.



EASY INSTALLATION

Our SPC flooring is provided with Unilin click systems for simple and quick installation, which makes no glue and no nails installation possible. Tiles/planks click into place with one simple movement. Besides, it can be easily installed on a variety of subfloors or existing flooring, saving your time and money.



100% WATERPROOF

As the SPC vinyl layer is completely waterproof, therefore, SPC flooring has excellent waterproof and dampproof performances. Mildew will not happen on SPC flooring and keep your floor as good as new. As a result, it is widely used in laundry rooms, bathrooms, basements and kitchens.



WARM UNDERFOOT

SPC flooring has excellent thermal conductivity and can help maintain floor temperature so it does not get cold even during rainy days. Unlike the hard surface of ceramic floor, SPC flooring is soft and provides extra and comfort when standing or walking on it in barefoot.



ECO-FRIENDLY

Made of 100% recycle natural limestone powder and virgin PVC, all UTOP SPC flooring does not contain heavy metals, phthalate, methanol and other harmful substances. It will not do harm to the environment and human body.



EASY MAINTENANCE

SPC flooring is easy to clean. It only requires regular vacuuming or sweeping and occasional mopping. Normal dirt and debris can be easily swept away with a broom. Sticky spots can be easily removed with a wet mop for a more intense clean. It is a great choice for busy households.







SW-1806




SW-1807

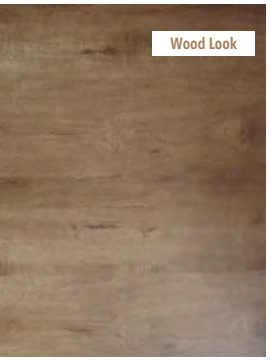

SW-1808

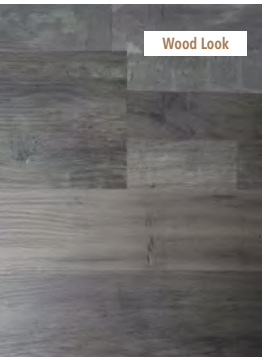


SW-1810

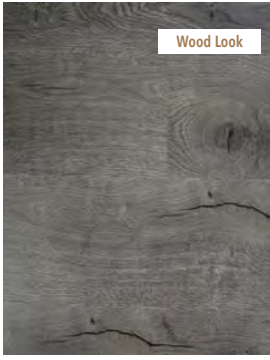


SW-1812



SW-1816

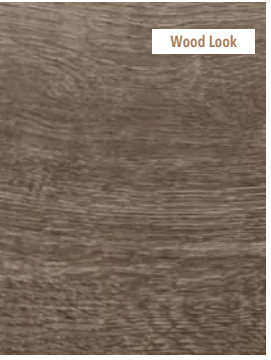

SW-1817

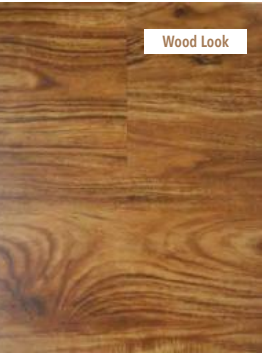


SW-1818




SW-1850



SW-1851

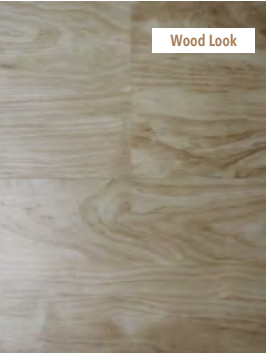

SW-1852

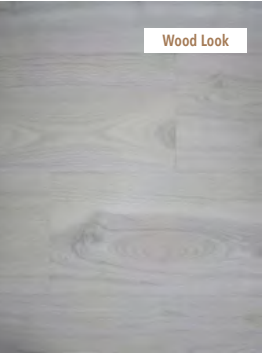

SW-1853



SW-1854




SW-1855



SW-1856



SW-1880

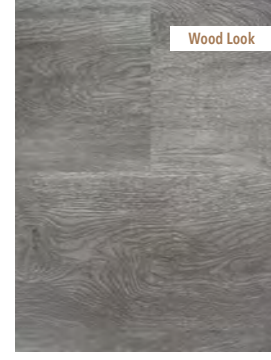


SW-1801




SW-1802




SW-1803

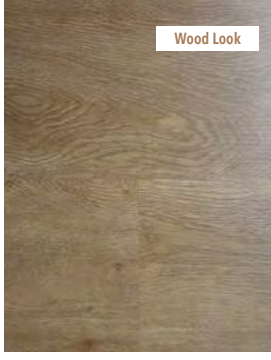


SW-1804

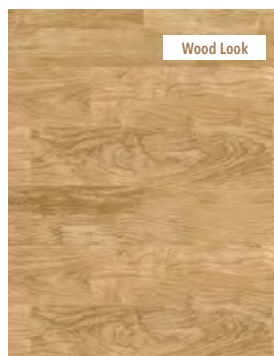


SW-1882

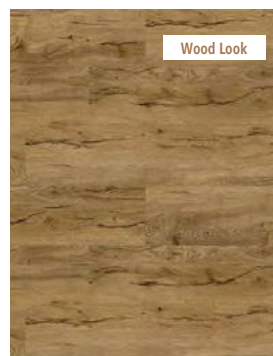


SW-1885

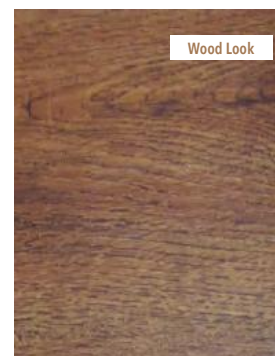


SW-1888

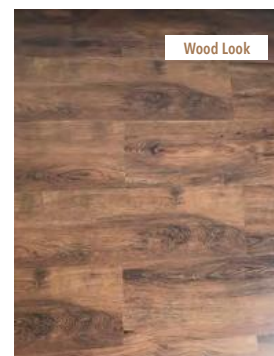


SW-1889

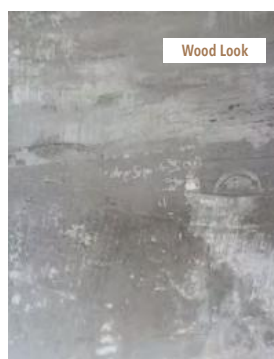


SW-1901

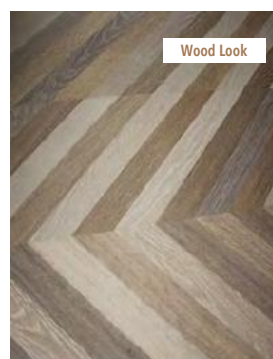


SW-1904

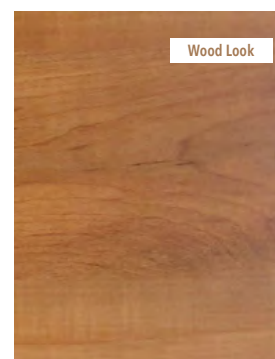


SW-1906

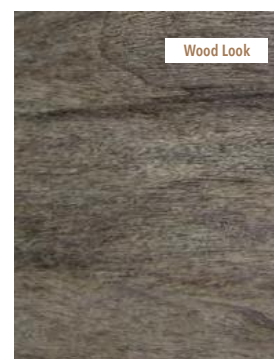


SW-1907

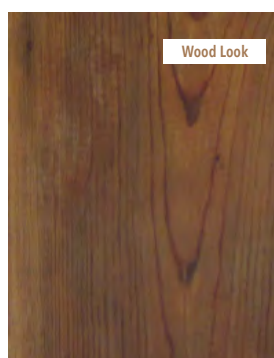


SW-1909

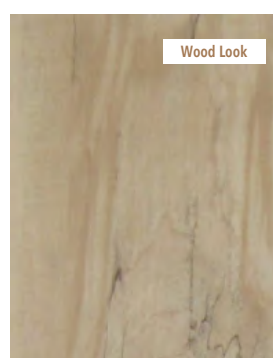


SW-1913

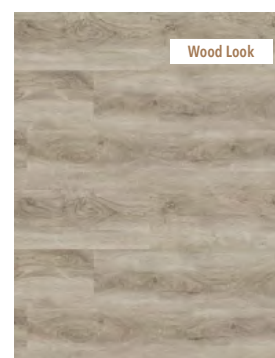


SW-1916

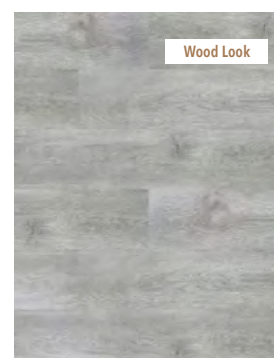


SW-1918

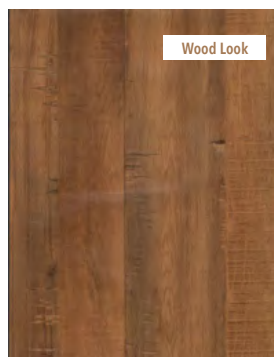


SW-1960

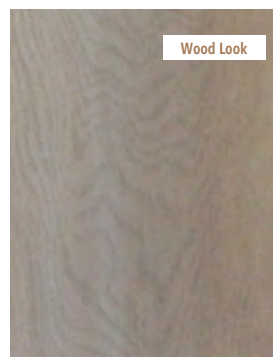


SW-1965

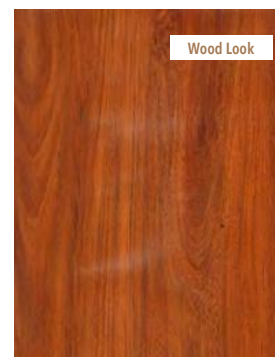


SW-1966

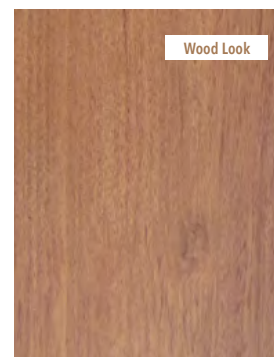


SW-1968

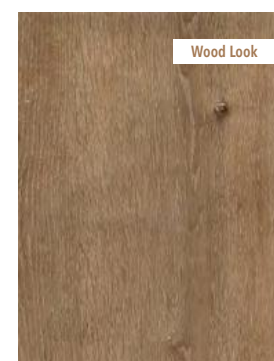


SW-1969

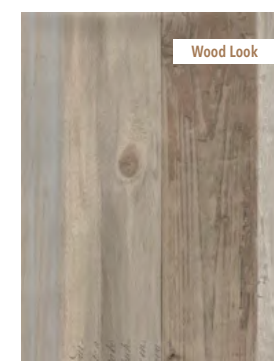


SW-1971

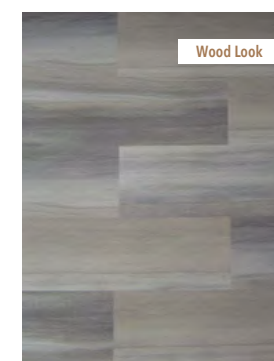


SW-1972

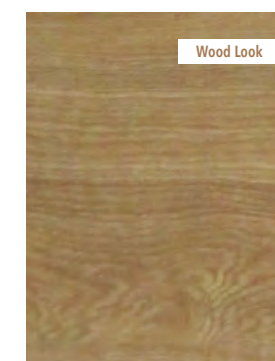


SW-1973

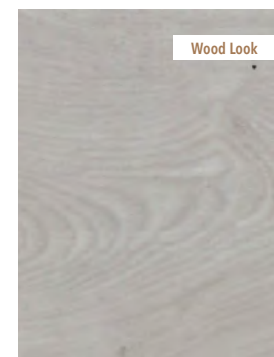


SW-1974

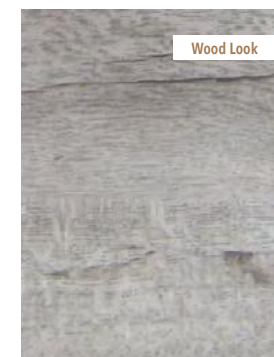


SW-1975

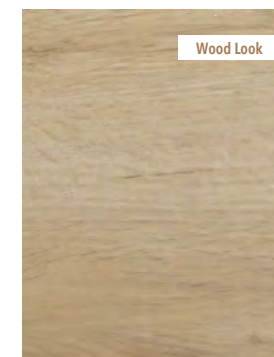


SW-1976

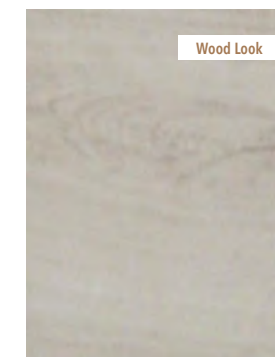


SW-1977

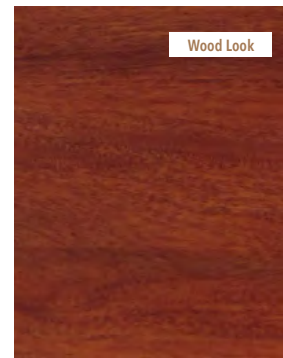


SW-1978

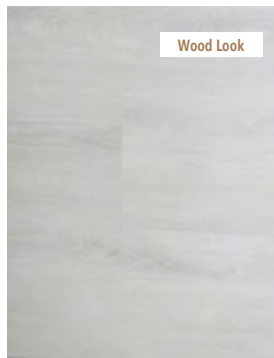


SW-9904

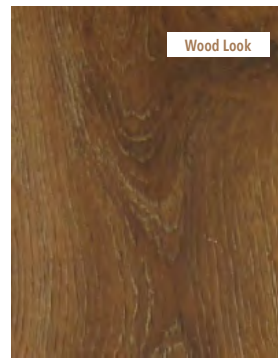


SW-9905

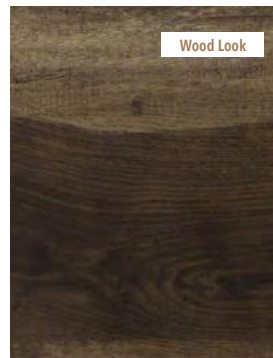


SW-9907

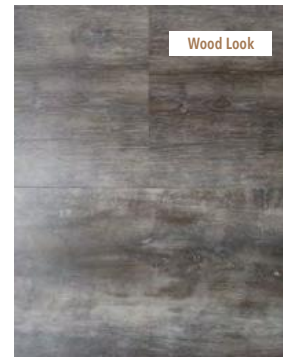


SW-1806

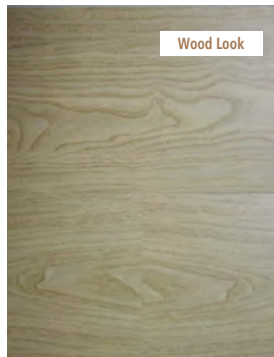


SW-1807

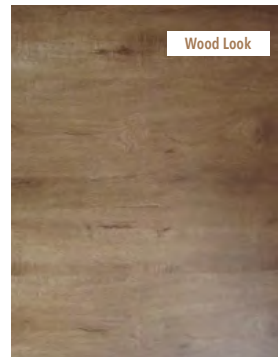


SW-1808

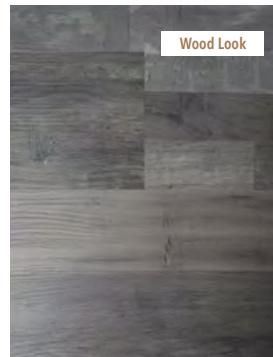


SW-1810

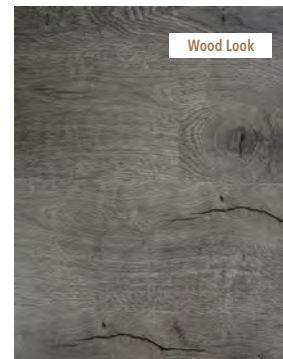


SW-1812

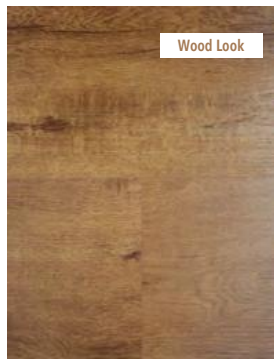


SW-1816

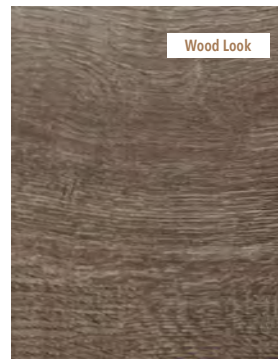


SW-1817

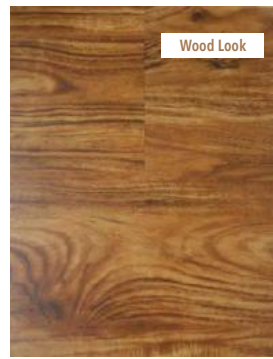

SW-1818

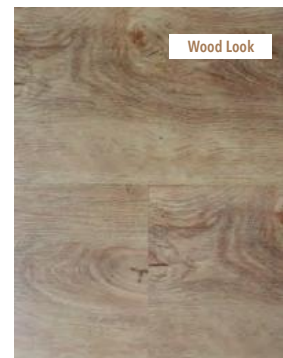

SW-1850

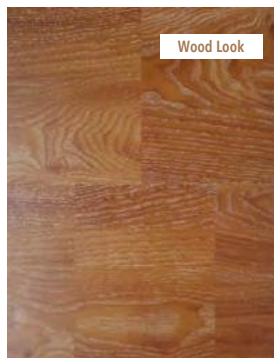

SW-1851

WOOD LOOK SPC FLOORING NEW ARRIVALS



SW-2160



SW-2161



SW-2162



SW-2163



SW-2164



SW-2165



SW-2166



SW-2167




SW-2168



SW-2169



SW-2170



SW-2171







SW-2172

WOOD LOOK SPC FLOORING

INSTALLATION & MAINTENANCE

Precautions before installation


-  SPC flooring should be leveled and placed on site with constant temperature and stability for 24 hours before installation;
-  Make sure the subfloor is smooth and clean before installing the flooring, without any residue;
-  When installing the flooring, the indoor temperature should be kept between 15 °C and 28 °C. Indoor temperature and surface temperature at 15 °C are recommended. When the temperature is lower than 5 °C or higher than 30 °C, the installation shall not be performed. The relative air humidity suitable for construction should be between 20% and 75%.
-  The moisture content of the base layer shall be less than 3%. The strength of the base layer shall not be lower than the requirement of concrete strength C-20, otherwise suitable self-leveling should be used to strengthen the strength. The surface hardness of the base layer is not less than 1.2 MPa.

INSTALLATION




STEP 1

Before installation, it is recommended to spread floor film, which can make better feeling of feet and prevent the noise generated between the ground and the floor by small grains of sand. Put the first floor from the left corner of the room.

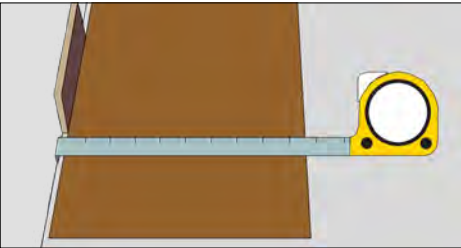


STEP 2

To prevent the natural expansion of the floor, at least 0.4 cm gap should be reserved between the wall and the floor.

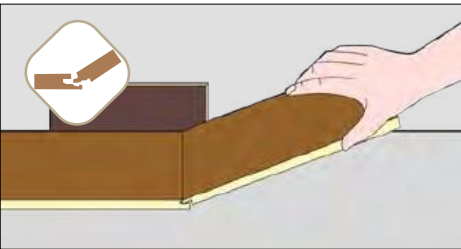


STEP 3

When installing the first and second floor, insert the convex damage of the short side into the groove of the first floor. Continue to use the above method to install other floors.

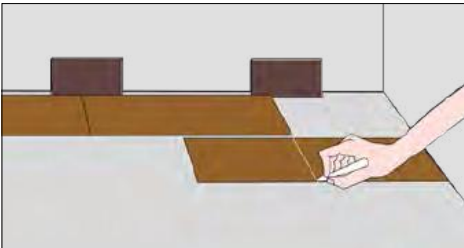


STEP 4

When installing the last piece of the first row, you need to take the remaining part of the floor measurement first, and note that the floor needs to be measured in reverse.

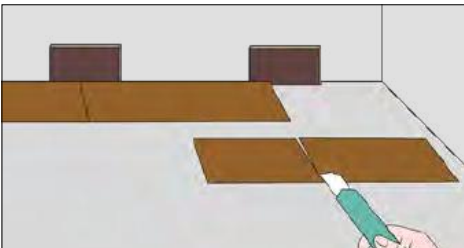

STEP 5

Finally, use the art knife to force the floor surface, break it by hands easily, then install the last floor of the first row.

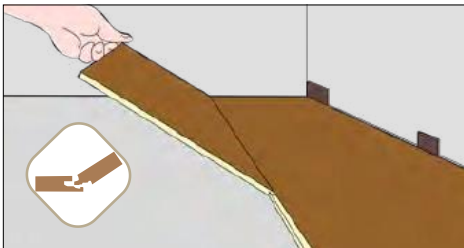


STEP 6

Start installing the second row. When installing the second floor, insert the convex of the short side into the groove of the previous floor, and gently insert the convex of the long side into the corresponding floor groove.



STEP 7

Use a rubber hammer when there are gaps.

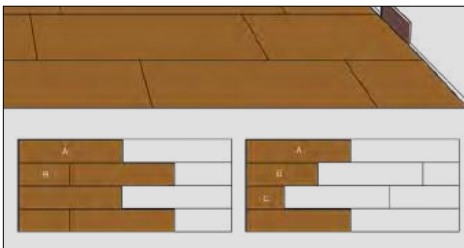

STEP 8

Recommended installation method reference picture.



STEP 9

Finally, the same method can be used to install other floors in the room to ensure that necessary expansion gaps are left between all fixed vertical planes in the room, including doors, walls, cabinets and other fixed objects.



WOOD LOOK SPC FLOORING 100% WATERPROOF

Thanks to the high durability and 100% waterproof performance, it only takes a few simple care and maintenance steps to keep your UTOP SPC flooring looking new and beautiful for years to come.



Always clean up spills or liquids immediately.



Clean dust and debris regularly with a broom or vacuum with soft bristles.



Mop as needed, use a dampened mop and cleaner approved for use on SPC flooring. Never use harsh cleaning chemicals on SPC flooring to avoid floor damage.



Use felt protectors or other protective devices under furniture. Never push, pull, or drag furniture across SPC flooring. Always lift and carry.










Heavy furniture or appliances that are not moved often should be equipped with flat, nonstaining floor protectors.



Place mats at exterior doors to reduce dirt and debris tracked into floor. Do not use mats with rubber or latex backings as they may cause discoloration or staining to SPC flooring.




For spot stain treatment, use a diluted bleach solution that is 1 part bleach, 10 parts water.

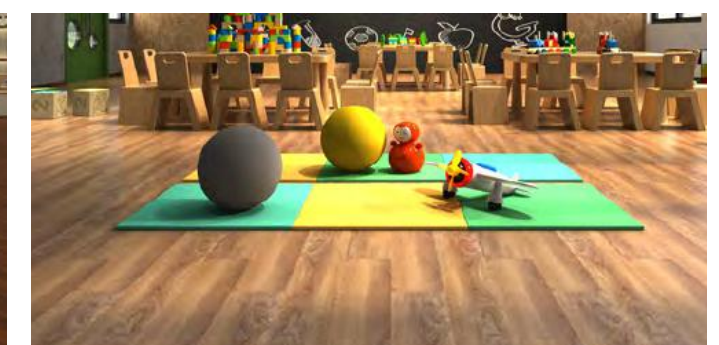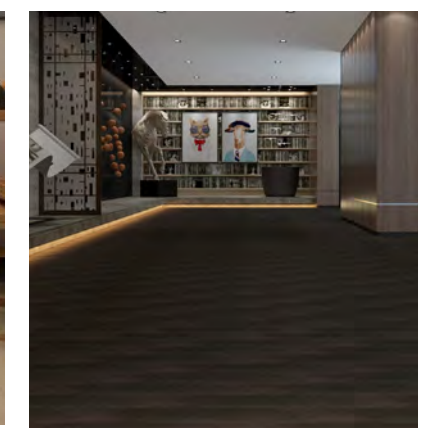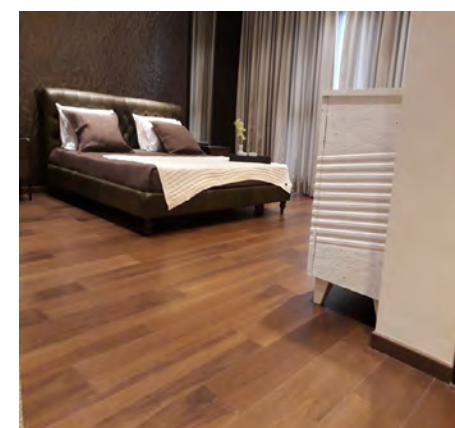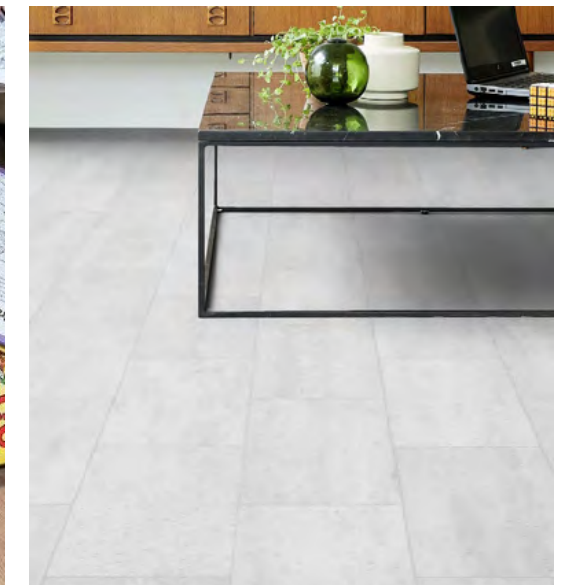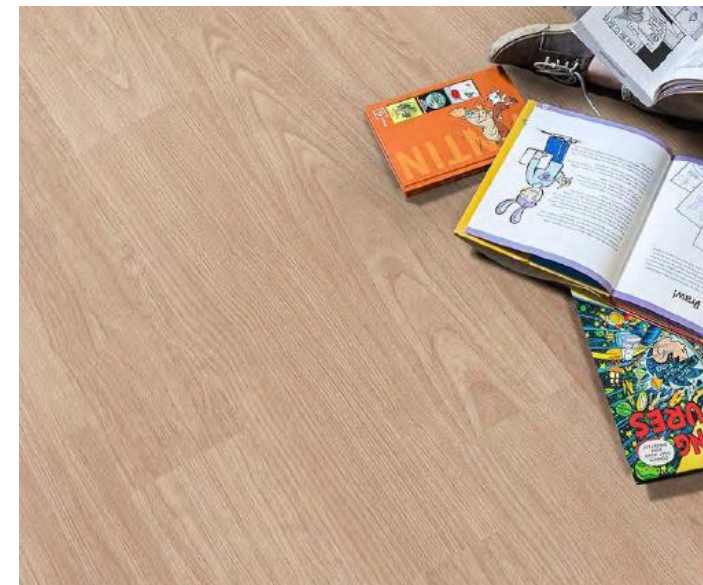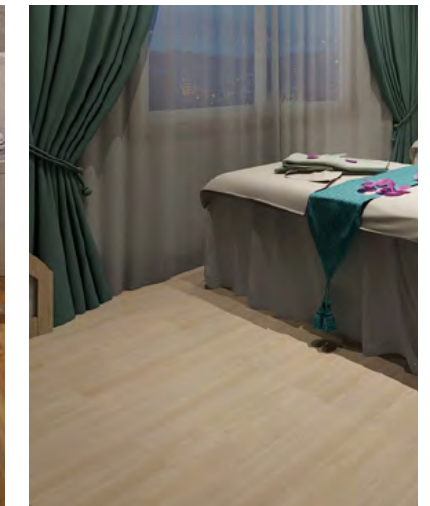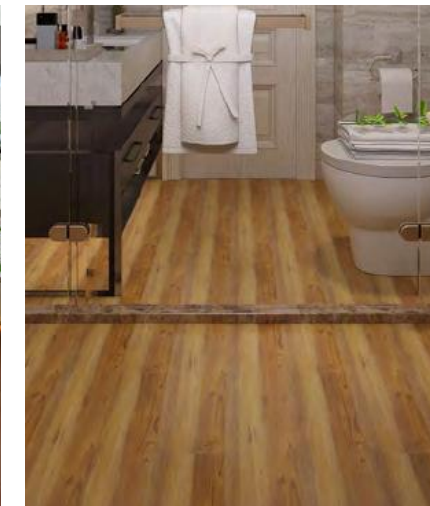




SPC FLOORING STONE LOOK

Stone look SPC flooring, also known as SPC stone flooring, refers to rigid core vinyl flooring that offers the look, feel and stability of high-end natural stone flooring while providing a warmer and more comfortable underfoot than natural stone flooring.



STONE LOOK

These realistic stone look design comes in many different colors, patterns and styles. The high definition decoration layer in the SPC flooring offers the look and feel of natural stone without the need of being treated with a sealing agent like natural stone. Besides, our stone look SPC flooring is more budget-friendly than natural stone flooring.

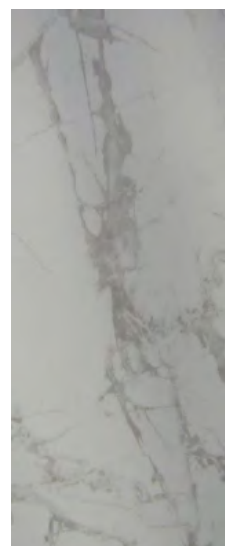

STONE LOOK SPC FLOORING

COMBINES STONE BEAUTY & GREAT IMPACT RESISTANCE



EXCEPTIONAL DURABILITY

We offer a 25-year warranty for our residential SPC flooring and a 10-year warranty for our commercial SPC flooring. All our SPC flooring is provided with a wear layer that can withstand about 10,000 wear-resisting revolutions and higher. It ensures our SPC flooring works well in both residential and commercial environments.



WARM UNDERFOOT

SPC flooring has excellent thermal conductivity and can help maintain floor temperature so it does not get cold even during rainy days. Unlike the hard surface of ceramic floor, SPC flooring is soft and provides extra and comfort when standing or walking on it in barefoot.



ANTI-SLIP

Compared with other flooring materials, SPC flooring has great anti-slip performance. When the SPC flooring is stained with water, the friction becomes bigger, the feet feel more astringent and less likely to fall. In this way, pedestrians and customers can effectively avoid slipping and wrestling arising from wet floor.



IMPACT RESISTANCE

The core SPC flooring texture is soft and elastic. Under the impact of heavy objects, SPC flooring offers strong impact resistance and great resilience to heavy impact and will not cause floor damage. Besides, it also minimizes damage to the body and disperses impact on the foot, thereby avoiding wrestling damage.



FLAME RETARDANT

According to the statistics of authoritative departments: 95% of the people injured in the fire is caused by toxic gas generated when burning. The main component of the SPC flooring is natural limestone powder, in case of fire, the SPC flooring has great flame retardant performance and will not produce asphyxiating toxic and harmful gas.



ECO-FRIENDLY

Made of 100% recycle natural limestone powder and virgin PVC, all UTOP SPC flooring does not contain heavy metals, phthalate, methanol and other harmful substances. It will not do harm to the environment and human body.



EASY INSTALLATION

Our SPC flooring is provided with Unilin click systems for simple and quick installation, which makes no glue and no nails installation possible. Tiles/planks click into place with one simple movement. Besides, it can be easily installed on a variety of subfloors or existing flooring, saving your time and money.




EASY MAINTENANCE

SPC flooring is easy to clean. It only requires regular vacuuming or sweeping and occasional mopping. Normal dirt and debris can be easily swept away with a broom. Sticky spots can be easily removed with a wet mop for a more intense clean. It is a great choice for busy households.







STONE LOOK SPC FLOORING
SURFACE PATTERNS

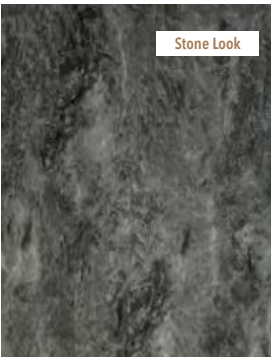


SS-9006

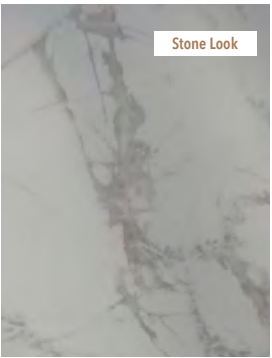


SS-9007

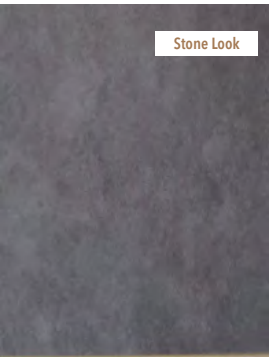

SS-9008-24

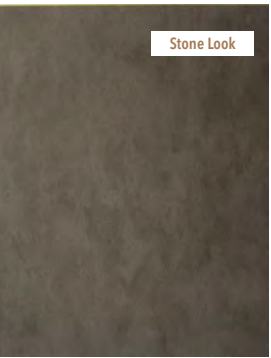


SS-9008-B

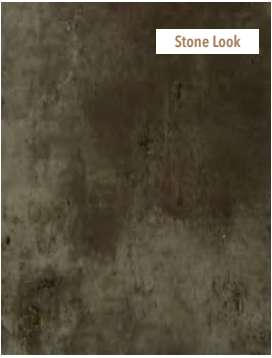


SW-1812




SW-1816

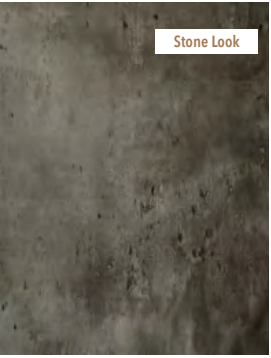

SW-1817

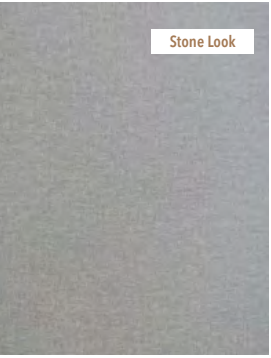

SW-1818

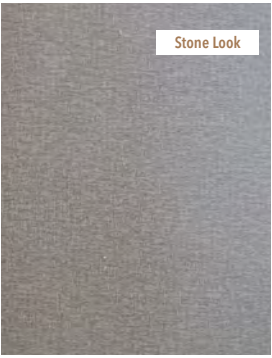

SS-9009-1



SS-9009-4




SS-9009-5




SS-9010-5



SS-9017

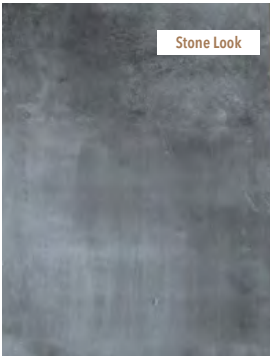

SS-9001

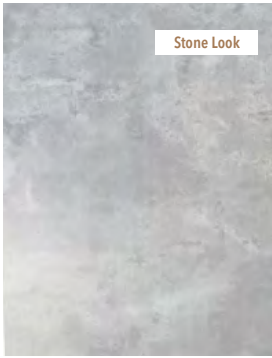

SS-9002



SS-9004




SS-9005

Wood Look




STONE LOOK SPC FLOORING


NEW ARRIVALS

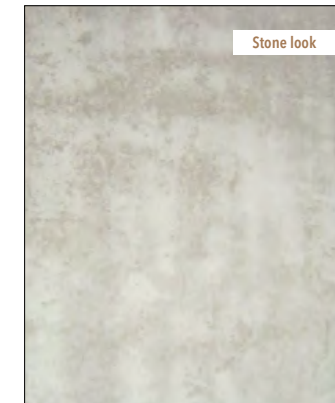


SS-2181

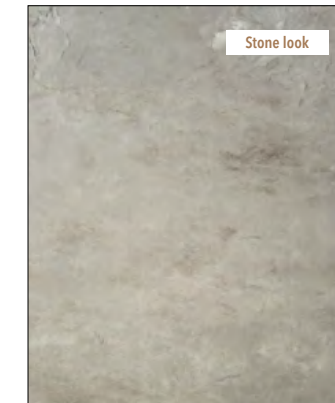


SS-2182

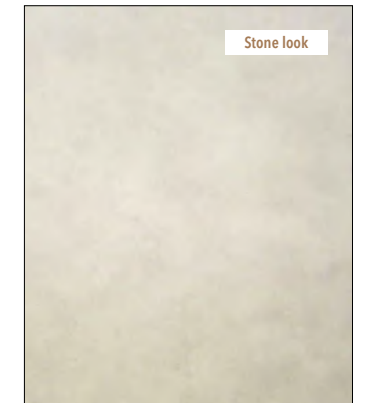


SS-2183

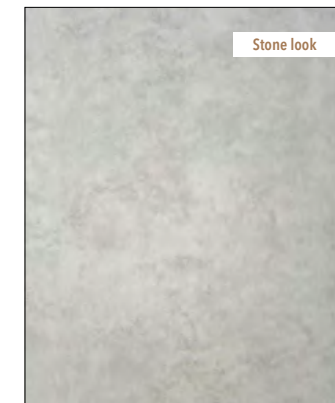


SS-2184

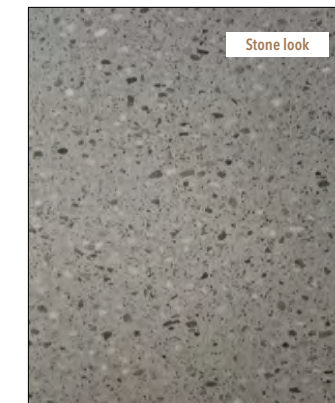

SS-2185

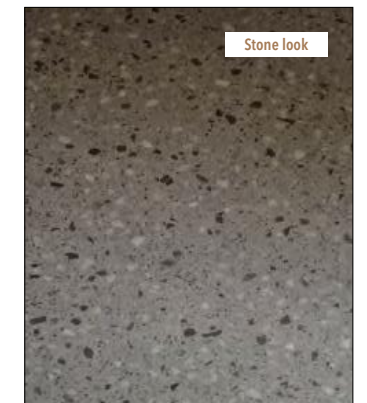

SS-2186

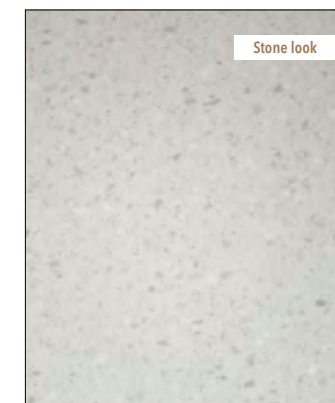





SS-2187


STONE LOOK SPC FLOORING

INSTALLATION & MAINTENANCE

Precautions before installation


-  SPC flooring should be leveled and placed on site with constant temperature and stability for 24 hours before installation;
-  Make sure the subfloor is smooth and clean before installing the flooring, without any residue;
-  When installing the flooring, the indoor temperature should be kept between 15 °C and 28 °C. Indoor temperature and surface temperature at 15 °C are recommended. When the temperature is lower than 5 °C or higher than 30 °C, the installation shall not be performed. The relative air humidity suitable for construction should be between 20% and 75%.
-  The moisture content of the base layer shall be less than 3%. The strength of the base layer shall not be lower than the requirement of concrete strength C-20, otherwise suitable self-leveling should be used to strengthen the strength. The surface hardness of the base layer is not less than 1.2 MPa.

INSTALLATION

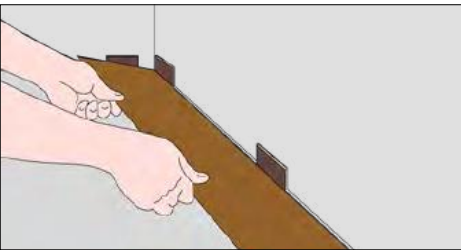


STEP 1

Before installation, it is recommended to spread floor film, which can make better feeling of feet and prevent the noise generated between the ground and the floor by small grains of sand. Put the first floor from the left corner of the room.

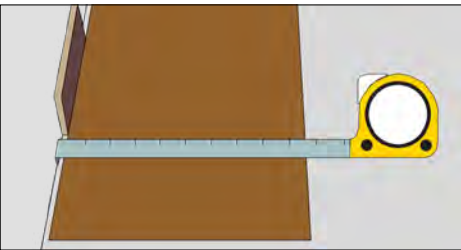


STEP 2

To prevent the natural expansion of the floor, at least 0.4 cm gap should be reserved between the wall and the floor.

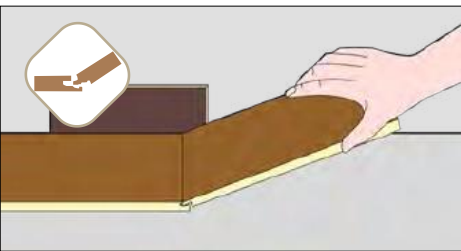


STEP 3

When installing the first and second floor, insert the convex damage of the short side into the groove of the first floor. Continue to use the above method to install other floors.

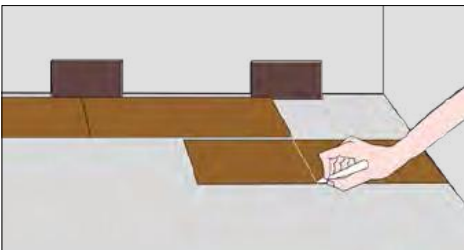


STEP 4

When installing the last piece of the first row, you need to take the remaining part of the floor measurement first, and note that the floor needs to be measured in reverse.

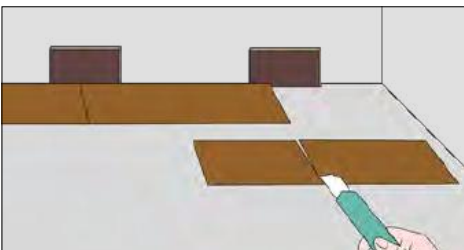

STEP 5

Finally, use the art knife to force the floor surface, break it by hands easily, then install the last floor of the first row.

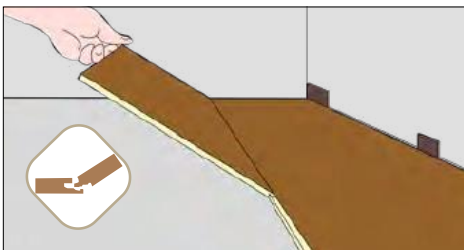


STEP 6

Start installing the second row. When installing the second floor, insert the convex of the short side into the groove of the previous floor, and gently insert the convex of the long side into the corresponding floor groove.



STEP 7

Use a rubber hammer when there are gaps.

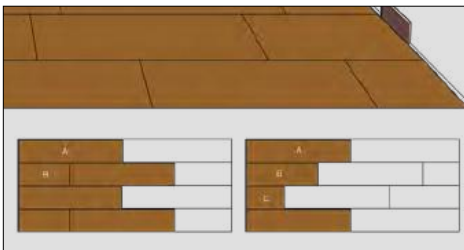

STEP 8

Recommended installation method reference picture.



STEP 9

Finally, the same method can be used to install other floors in the room to ensure that necessary expansion gaps are left between all fixed vertical planes in the room, including doors, walls, cabinets and other fixed objects.



STONE LOOK SPC FLOORING **100% WATERPROOF**

Thanks to the high durability and 100% waterproof performance, it only takes a few simple care and maintenance steps to keep your UTOP SPC flooring looking new and beautiful for years to come.



Always clean up spills or liquids immediately.



Clean dust and debris regularly with a broom or vacuum with soft bristles.



Mop as needed, use a dampened mop and cleaner approved for use on SPC flooring. Never use harsh cleaning chemicals on SPC flooring to avoid floor damage.



Use felt protectors or other protective devices under furniture. Never push, pull, or drag furniture across SPC flooring. Always lift and carry.






Heavy furniture or appliances that are not moved often should be equipped with flat, nonstaining floor protectors.



Place mats at exterior doors to reduce dirt and debris tracked into floor. Do not use mats with rubber or latex backers as they may cause discoloration or staining to SPC flooring.



For spot stain treatment, use a diluted bleach solution that is 1 part bleach, 10 parts water.

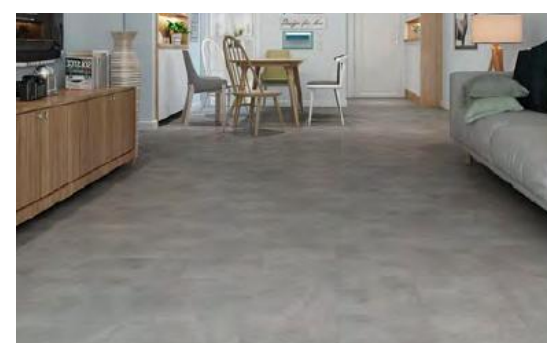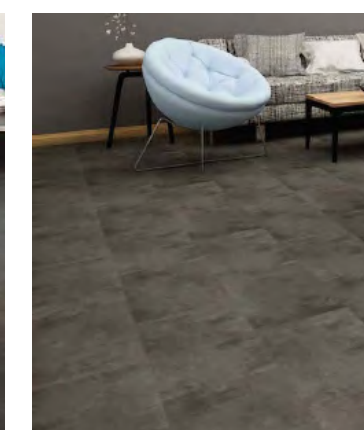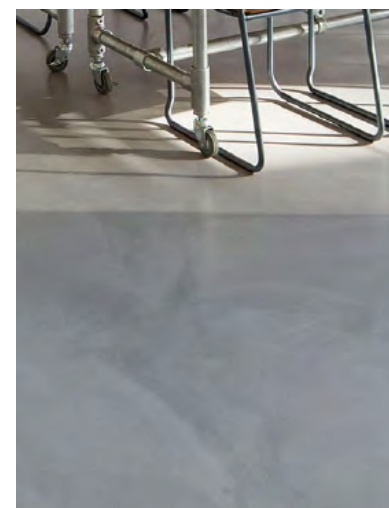




SPC FLOORING

WOVEN & CARPET LOOK

Woven & carpet Look SPC Flooring offers extremely realistic woven & carpet appearance while preserving excellent waterproof, stain resistance and fire retardant performance than real woven & carpet flooring.



WOVEN & CARPET LOOK

The high definition decoration layer in the SPC flooring offers the look and feel of woven & carpet flooring while delivering exceptional durability and stain resistance performance that will keep it looking fantastic for decades. Besides, our SPC flooring has great fire retardant performance and will not catch fire easily like real woven & carpet flooring.



WOVEN & CARPET LOOK SPC FLOORING

DURABLE AND EASY TO CLEAN FLOORING



EXCEPTIONAL DURABILITY

We offer a 25-year warranty for our residential SPC flooring and a 10-year warranty for our commercial SPC flooring. All our SPC flooring is provided with a wear layer that can withstand about 10,000 wear-resisting revolutions and higher. It ensures our SPC flooring works well in both residential and commercial environments.



100% WATERPROOF

As the SPC vinyl layer is completely waterproof, therefore, SPC flooring has excellent waterproof and dampproof performances. Mildew will not happen on SPC flooring and keep your floor as good as new. As a result, it is widely used in laundry rooms, bathrooms, basements and kitchens.



STAIN RESISTANCE

SPC flooring surface is covered with a special treated UV layer and wear layer that provide excellent stain resistance performance. Besides, SPC flooring is 100% waterproof and stains can be completely removed with a broom or a wet mop. It helps you saving a lot of time on flooring cleaning.



ANTI-SLIP

Compared with other flooring materials, SPC flooring has great anti-slip performance. When the SPC flooring is stained with water, the friction becomes bigger, the feet feel more astringent and less likely to fall. In this way, pedestrians and customers can effectively avoid slipping and wrestling arising from wet floor.



FLAME RETARDANT

According to the statistics of authoritative departments: 95% of the people injured in the fire is caused by toxic gas generated when burning. The main component of the SPC flooring is natural limestone powder, in case of fire, the SPC flooring has great flame retardant performance and will not produce asphyxiating toxic and harmful gas.



ECO-FRIENDLY

Made of 100% recycle natural limestone powder and virgin PVC, all UTOP SPC flooring does not contain heavy metals, phthalate, methanol and other harmful substances. It will not do harm to the environment and human body.




EASY INSTALLATION

Our SPC flooring is provided with Unilin click systems for simple and quick installation, which makes no glue and no nails installation possible. Tiles/planks click into place with one simple movement. Besides, it can be easily installed on a variety of subfloors or existing flooring, saving your time and money.



EASY MAINTENANCE

SPC flooring is easy to clean. It only requires regular vacuuming or sweeping and occasional mopping. Normal dirt and debris can be easily swept away with a broom. Sticky spots can be easily removed with a wet mop for a more intense clean. It is a great choice for busy households.

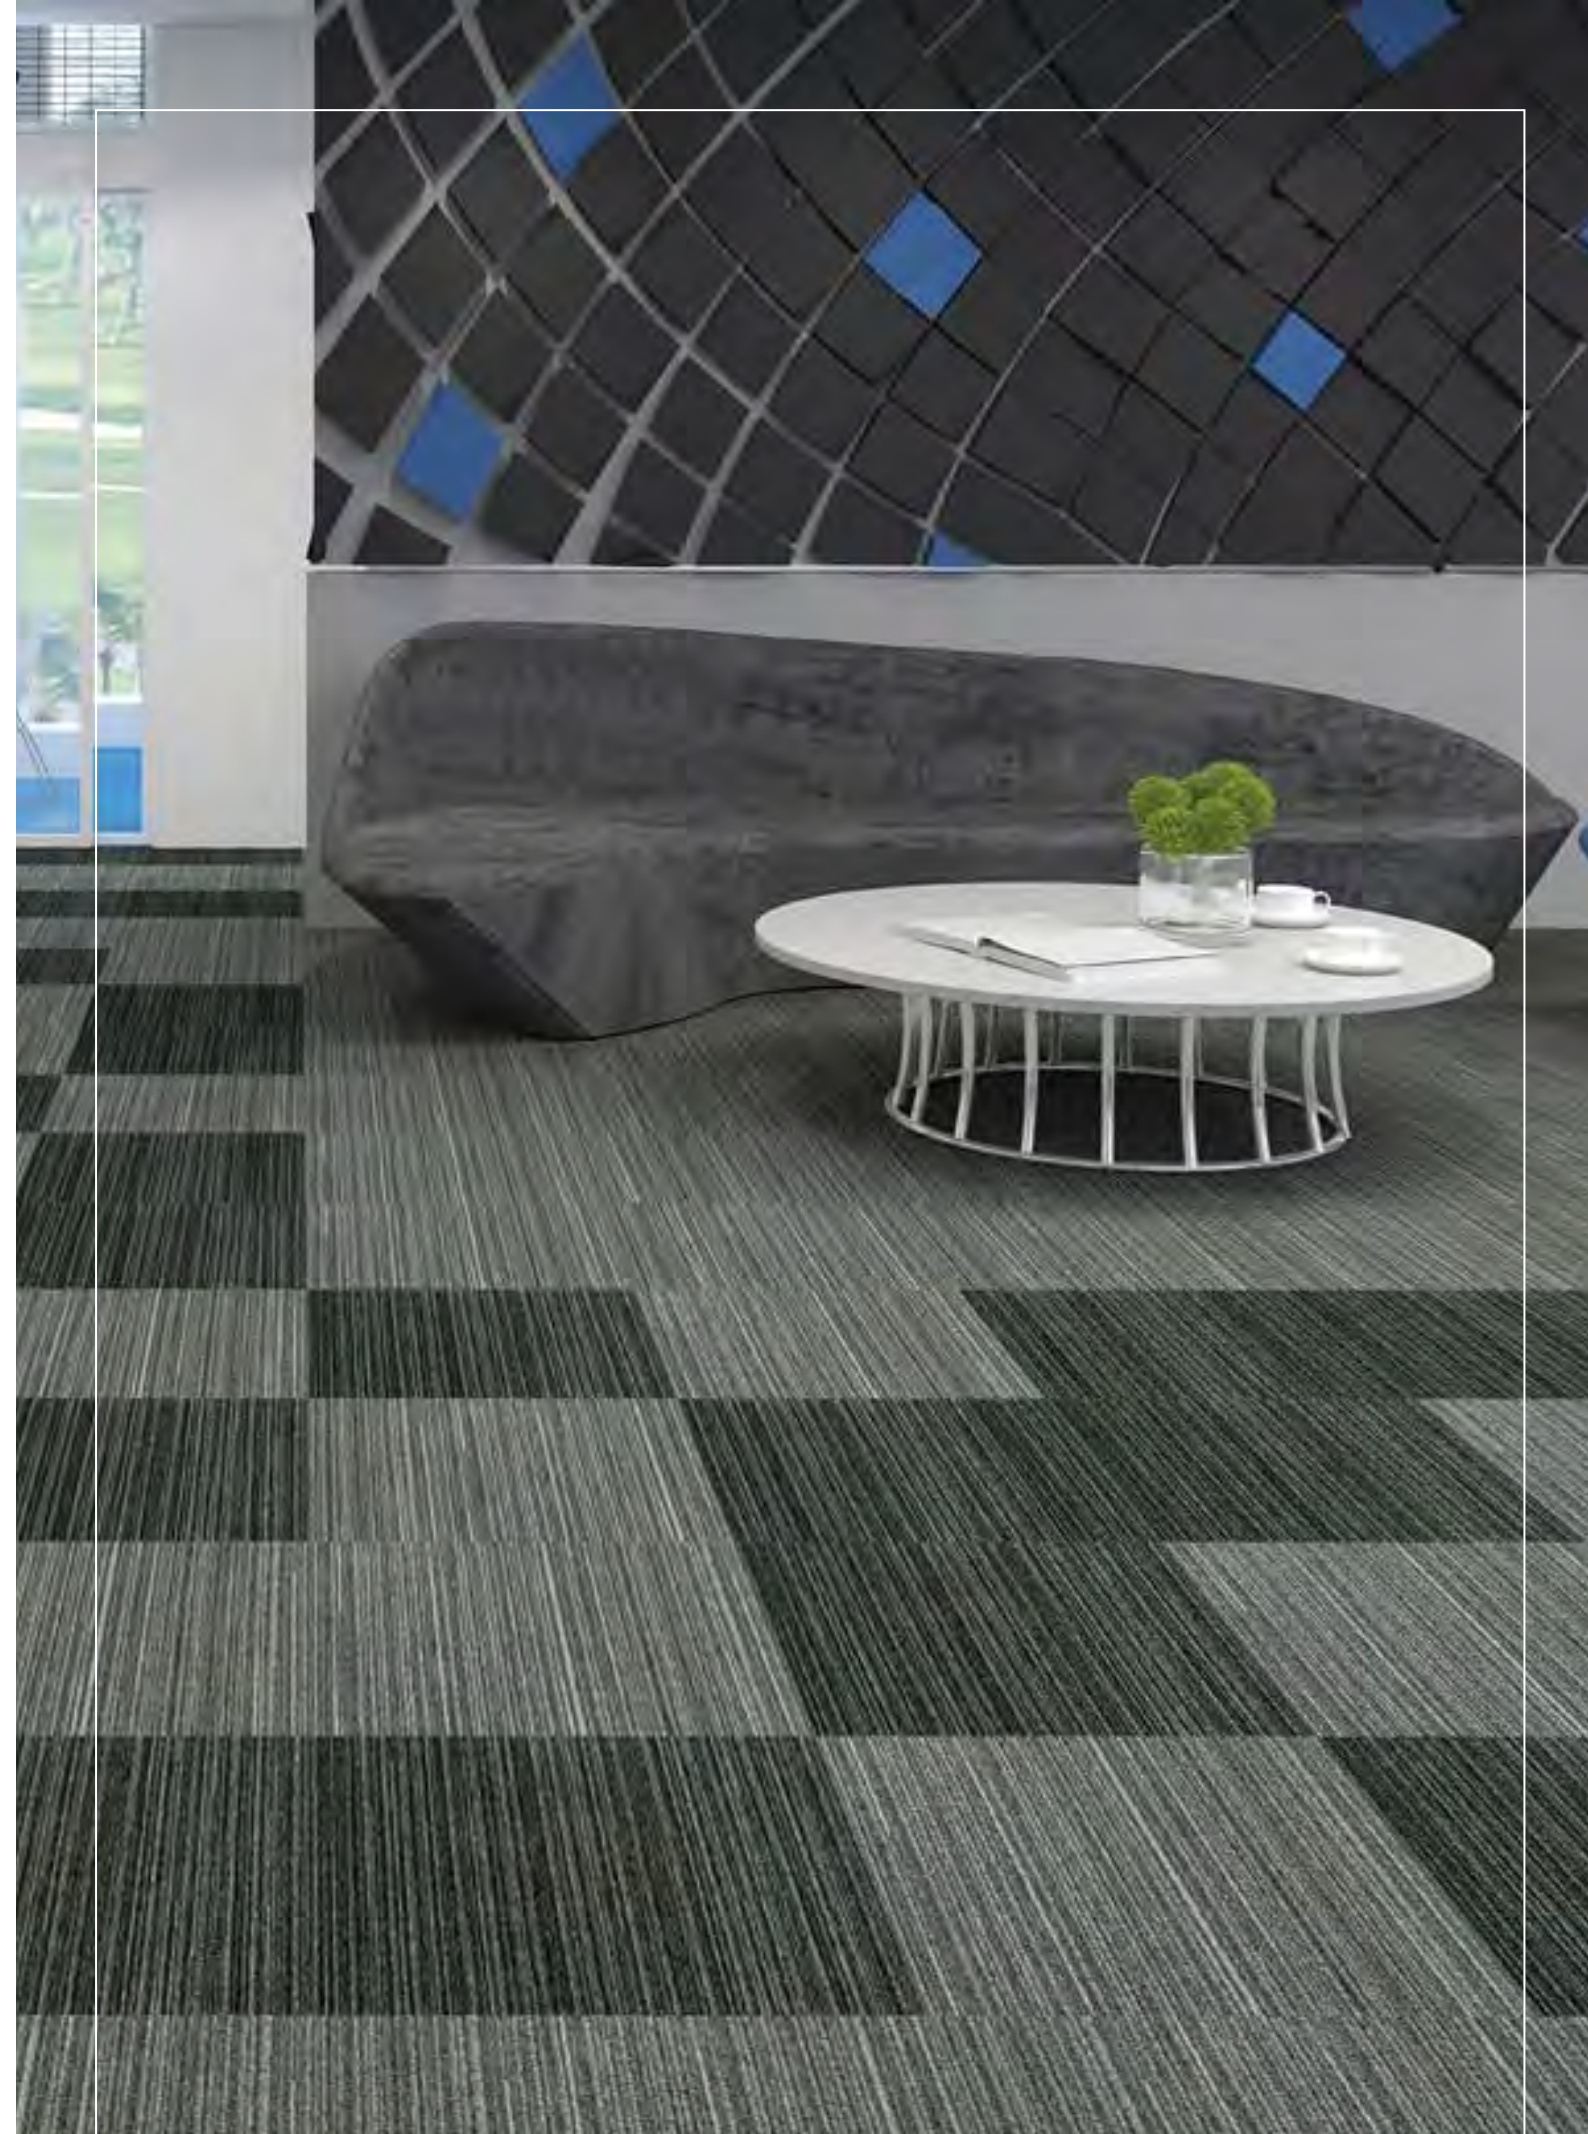




WOVEN & CARPET LOOK SPC FLOORING SURFACE PATTERNS

STONE LOOK SPC FLOORING NEW ARRIVALS



SC-2190

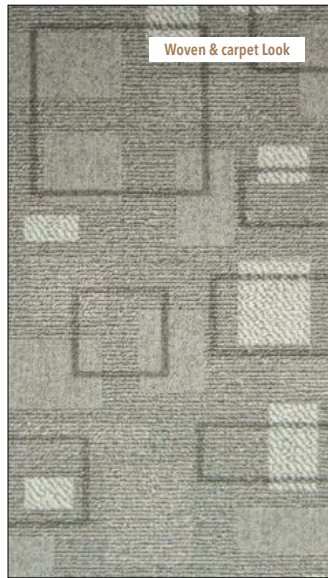

SC-2191




SC-2193




SC-2194




SC-2195

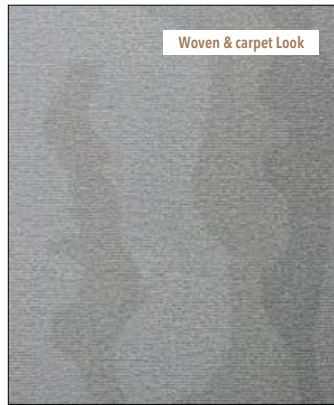

SC-9013-2

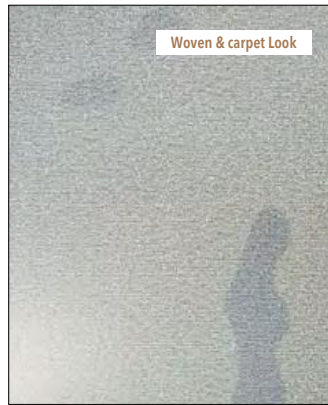

SC-9013-5

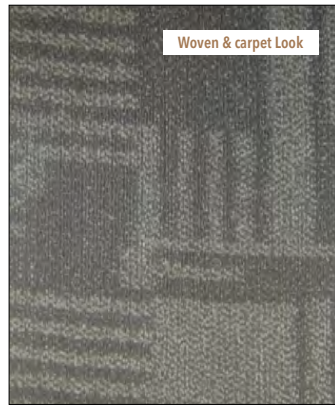





SC-9003

WOVEN & CARPET LOOK SPC FLOORING

INSTALLATION & MAINTENANCE

Precautions before installation


-  SPC flooring should be leveled and placed on site with constant temperature and stability for 24 hours before installation;
-  Make sure the subfloor is smooth and clean before installing the flooring, without any residue;
-  When installing the flooring, the indoor temperature should be kept between 15 °C and 28 °C. Indoor temperature and surface temperature at 15 °C are recommended. When the temperature is lower than 5 °C or higher than 30 °C, the installation shall not be performed. The relative air humidity suitable for construction should be between 20% and 75%.
-  The moisture content of the base layer shall be less than 3%. The strength of the base layer shall not be lower than the requirement of concrete strength C-20, otherwise suitable self-leveling should be used to strengthen the strength. The surface hardness of the base layer is not less than 1.2 MPa.

INSTALLATION




STEP 1

Before installation, it is recommended to spread floor film, which can make better feeling of feet and prevent the noise generated between the ground and the floor by small grains of sand. Put the first floor from the left corner of the room.

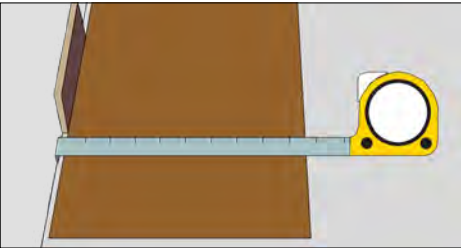


STEP 2

To prevent the natural expansion of the floor, at least 0.4 cm gap should be reserved between the wall and the floor.

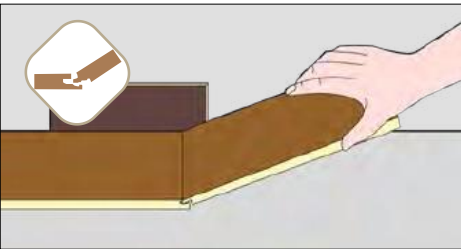


STEP 3

When installing the first and second floor, insert the convex damage of the short side into the groove of the first floor. Continue to use the above method to install other floors.

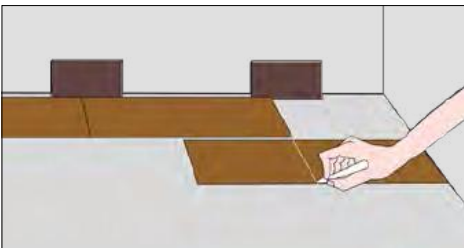


STEP 4

When installing the last piece of the first row, you need to take the remaining part of the floor measurement first, and note that the floor needs to be measured in reverse.

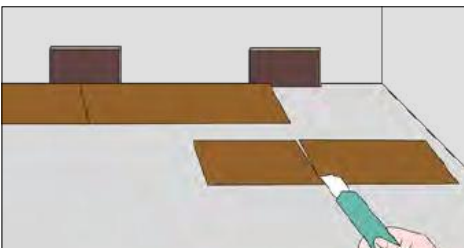

STEP 5

Finally, use the art knife to force the floor surface, break it by hands easily, then install the last floor of the first row.

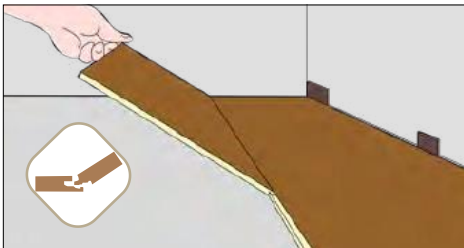


STEP 6

Start installing the second row. When installing the second floor, insert the convex of the short side into the groove of the previous floor, and gently insert the convex of the long side into the corresponding floor groove.



STEP 7

Use a rubber hammer when there are gaps.

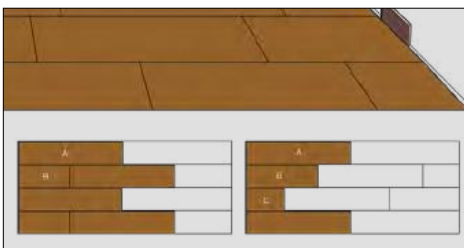

STEP 8

Recommended installation method reference picture.



STEP 9

Finally, the same method can be used to install other floors in the room to ensure that necessary expansion gaps are left between all fixed vertical planes in the room, including doors, walls, cabinets and other fixed objects.



STONE LOOK SPC FLOORING **100% WATERPROOF**



Always clean up spills or liquids immediately.



Clean dust and debris regularly with a broom or vacuum with soft bristles.



Mop as needed, use a dampened mop and cleaner approved for use on SPC flooring. Never use harsh cleaning chemicals on SPC flooring to avoid floor damage.



Use felt protectors or other protective devices under furniture. Never push, pull, or drag furniture across SPC flooring. Always lift and carry.




Heavy furniture or appliances that are not moved often should be equipped with flat, nonstaining floor protectors.



Place mats at exterior doors to reduce dirt and debris tracked into floor. Do not use mats with rubber or latex backers as they may cause discoloration or staining to SPC flooring.



For spot stain treatment, use a diluted bleach solution that is 1 part bleach, 10 parts water.

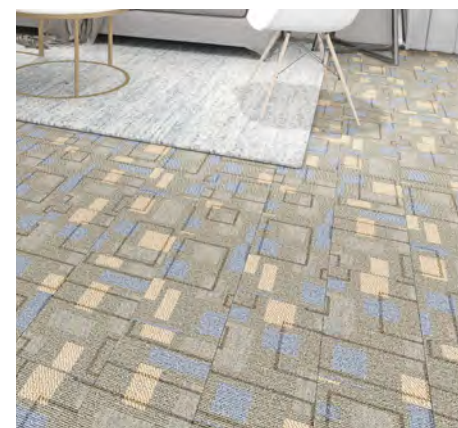



LVT FLOORING

Short for luxury vinyl tile, LVT flooring is a kind of floor covering that portrays the look of natural wood or stone yet providing excellent waterproof and stain & scratch resistance to perfectly adopt to the busiest lifestyles of modern times. As a result, it is widely used in various commercial and residential environments.

We mainly offer dry back type and self adhesive type LVT flooring products. Varying in structure and installation method, these two products provide the same excellent performance and enjoy equal durable service life.



Exceptional Durability



Eco Friendly



Authentic Designs



Waterproof



Anti Slip



Warm Underfoot



Easy Maintenance



Affordability

LVT FLOORING

A GREAT ALTERNATIVE TO NATURAL WOOD & STONE FLOORING



EXCEPTIONAL DURABILITY

We offer a 25-year warranty for residential uses and a 10-year warranty for commercial uses.



AUTHENTIC DESIGNS

LVT flooring comes in endless authentic design of patterns and styles to perfect meet your specific needs for flooring decoration.



ANTI SLIP

When the LVT flooring is stained with water, the friction becomes bigger to prevent walkers from falling down.



EASY MAINTENANCE

As a hygienic flooring, a simple cleaning regime with a damp mop is suffice. If you require a deep clean, the flooring is resilient to chemical cleaners.



ECO FRIENDLY

Made of recyclable materials, all LVT flooring products do not contain heavy metals, phthalate, methanol and other harmful substances.



WATERPROOF

Due to its waterproof properties, LVT flooring is an ideal choice for kitchens, bathrooms and anywhere with excess water.



WARM UNDERFOOT

LVT flooring is softer and warmer than real stone or ceramic, making it more comfortable to stand on and walk on.




AFFORDABILITY

Compared with traditional hardwood and stone flooring options, you can get high quality LVT flooring at a lower cost.



LVT FLOORING

STRUCTURE & FUNCTIONS

■ Dry back type

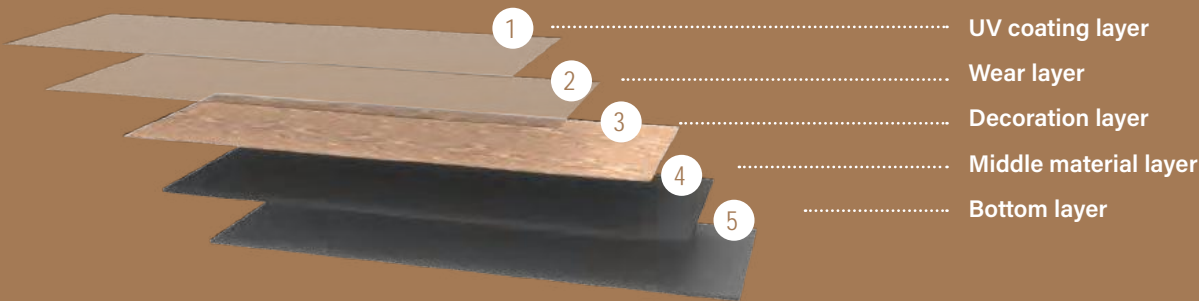

■ Self adhesive type

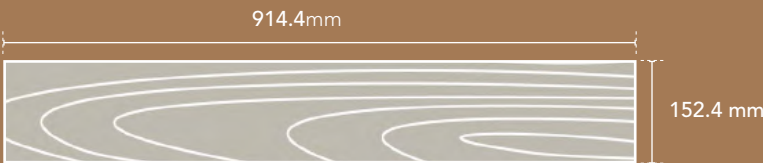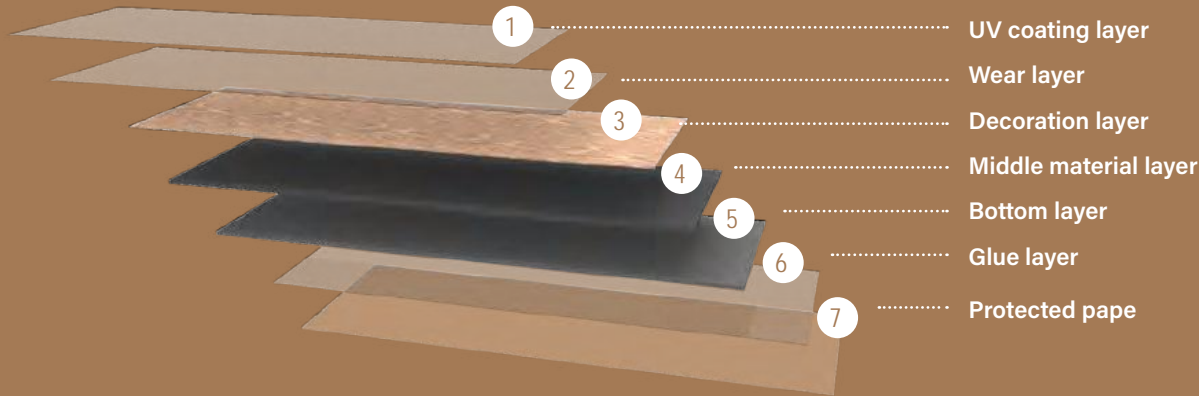





LVT FLOORING SURFACE PATTERNS



LF-702-9

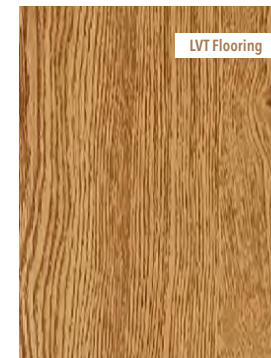

LF-111-10

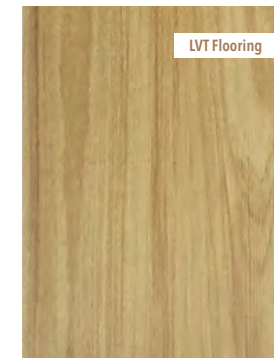


LF-139-4




LF-117-6



LF-118-1

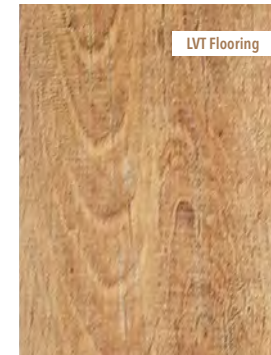

LF-121-2A

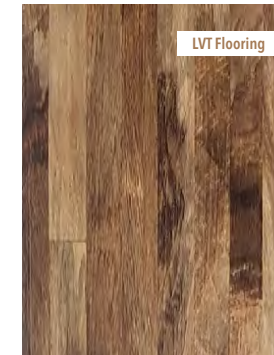


LF-160-24



LF-121-24




LF-124-3

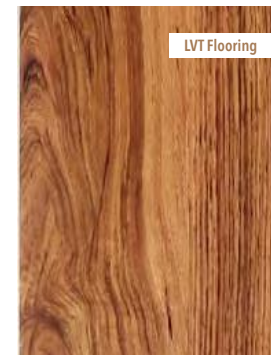

LF-163-1




LF-157-9

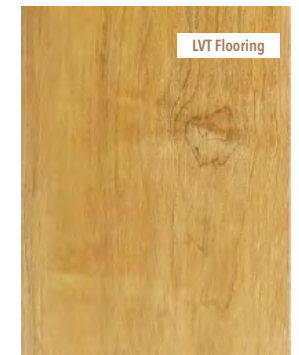


LF-306-5



LF-139-3

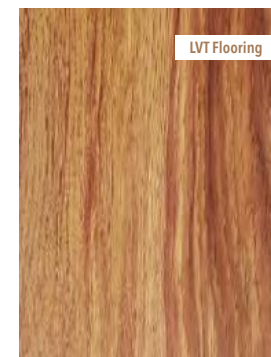


LF-256-7

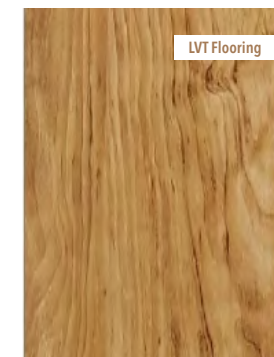


LF-1036-3




LF-156-1

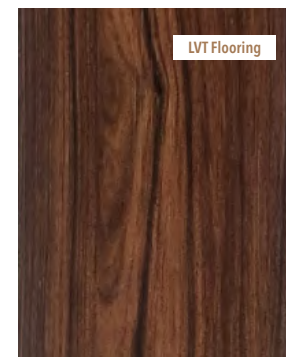


LF-156-7

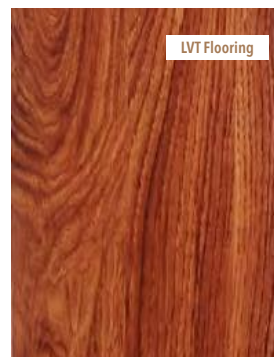


LF-163-6

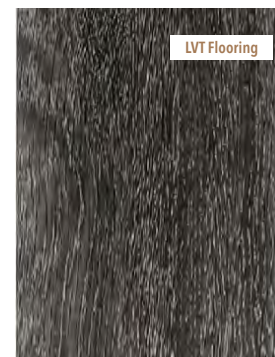


LF-121-21

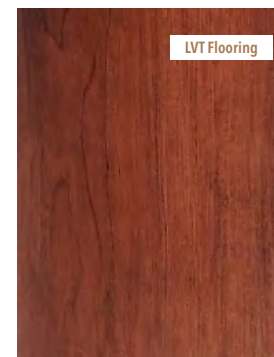


LF-306-3

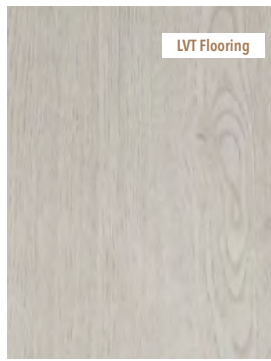


LF-111-8

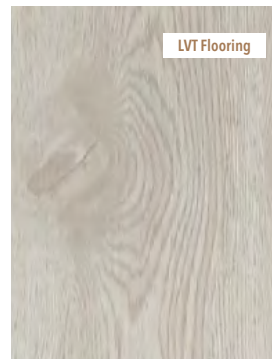


LF-111-8A

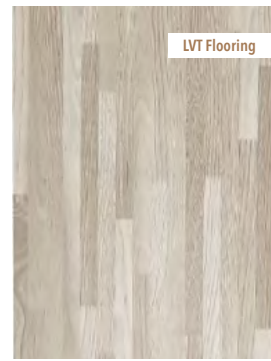


LF-117-1

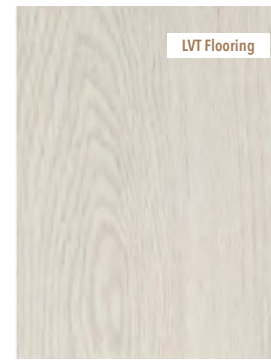


LF-111-40

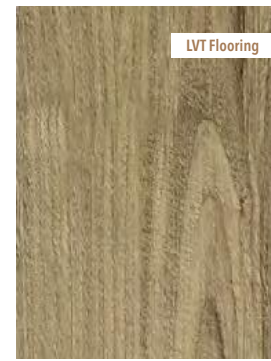

LF-312-2

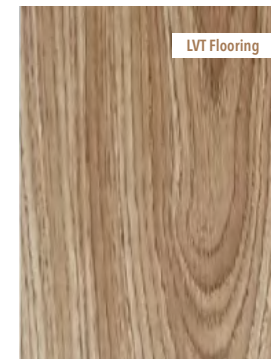

LF-165-1

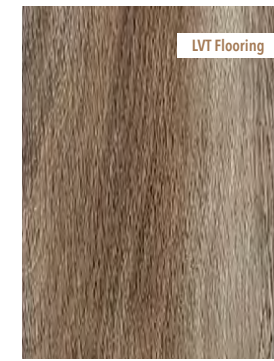


LF-199-1




LF-1010-1




LF-1001-32

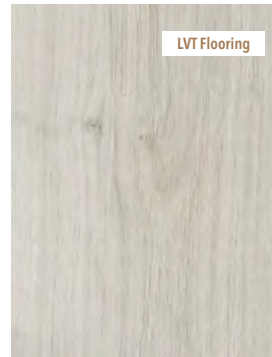


LF-301-11

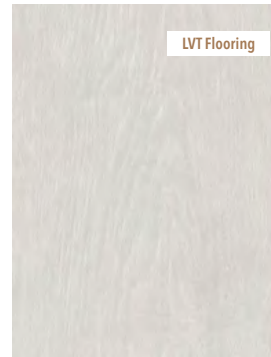

LF-1036-8

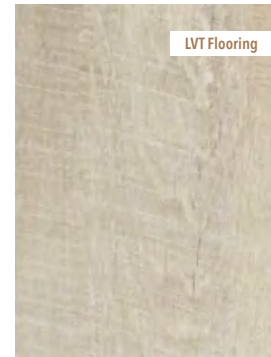


LF-726-19

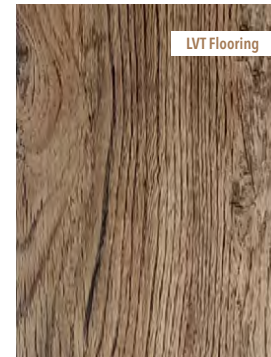

LF-1024-3



LF-1034-12

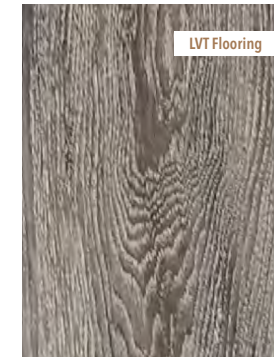


LF-1053-4




LF-239-3




LF-127-16

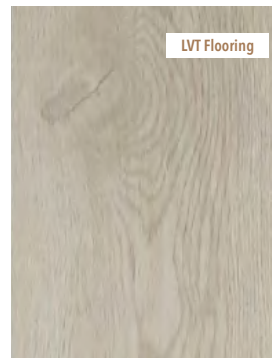

LF-702-25

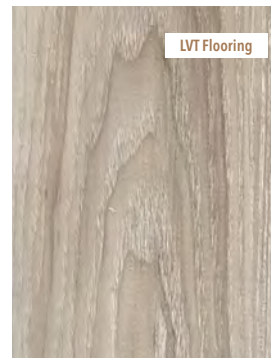


LF-1034-11

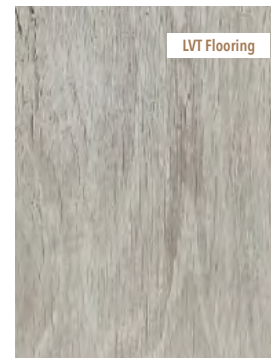


LF-127-13



LF-134-3

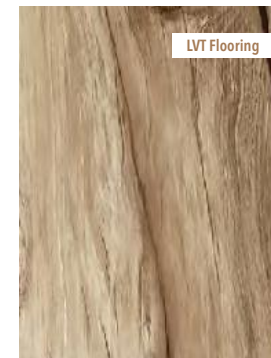

LF-116-4

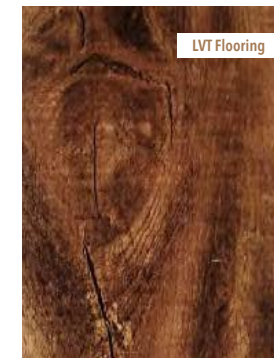

LF-149-1



LF-115-1




LF-301-15




LF-726-8




LF-735-2

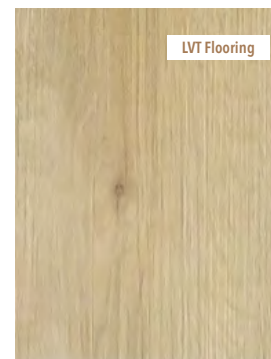

LF-309-1

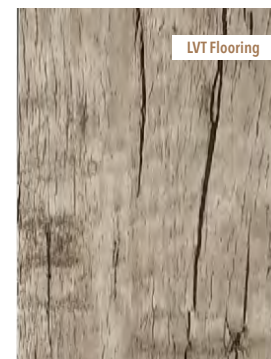

LF-7234-12

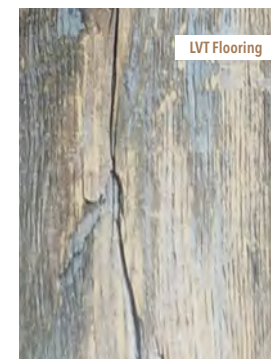

LF-180-3



LF-182-1A

LVT FLOORING


INSTALLATION & MAINTENANCE

Precautions before installation

- ✓ Store the unopened boxes in the room where the LVT flooring is to be installed for at least 48 hours before installation.
- ✓ Always store the boxes on a flat and level surface.
- ✓ Heating and air conditioning should be operational and set between 18 °C and 29 °C before, during and after installation.
- ✓ Remove thresholds and baseboards before you measure the room and calculate how much flooring to purchase.
- ✓ Remove the existing flooring to access to the subfloor if necessary.
- ✓ Use a patching compound to fill in all cracks and holes in your subfloor to get a smooth, even subfloor surface.
- ✓ Sweep the subfloor to make sure it is free from free of dust, stain and other contaminants.

INSTALLATION

■ Self-Adhesive LVT Flooring

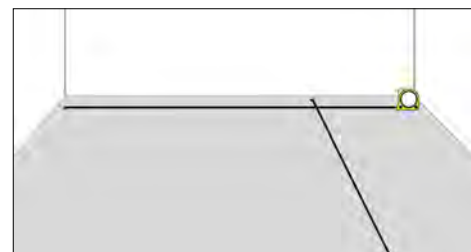


STEP 1

Use a tape ruler to measure the length and width of the room and determine the center of the room.




STEP 2

Snap chalk lines through the center of the room and divide the room into 4 equal sections.

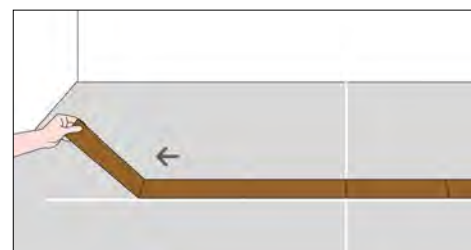

STEP 3

Lay a row of LVT flooring planks on the longest chalk line to see how they fit.

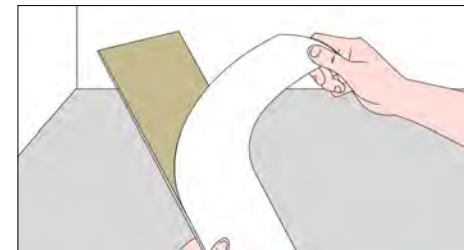

STEP 4

Flip the first plank over and grab the corner of the backing paper. Slowly peel the backing paper off of the first plank and throw it into the bin.




STEP 5

Flip the plank over and make sure the patterned side is face-up. Align the plank and make the plank flush against one of the corners where the chalk lines intersect.




STEP 6

Line up the short ends of planks and ensure the long edges are flush with one another. Press the second plank into place and continue to add more planks.

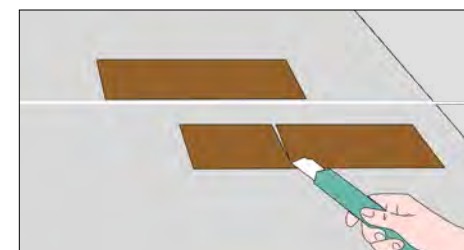


STEP 7

Measure the distance from the end of the last plank in the row to the wall. Cut the plank into the measured size. Install the cut plank on the end of the first row and make sure the cut edge is against the wall.

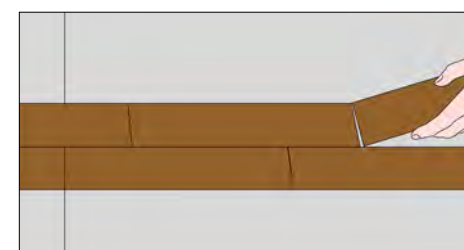

STEP 8

Move the first plank of your second row and make 1/2 or 1/3 of its length offset from the end of one of the planks in your first row. Stagger the rows of planks, offset the ends of each plank to hide the seams better.

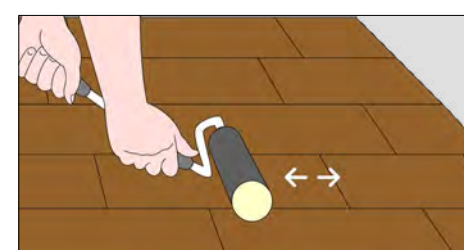


STEP 9

When the installation is finished, flatten the planks with a floor roller. Press the roller onto the planks and walk it across the length of the room to make sure planks are firmly adhered to the subfloor.

INSTALLATION


■ Dry Back LVT Flooring

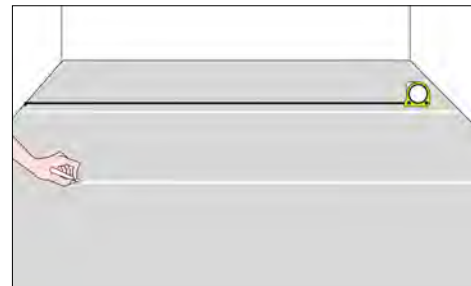

STEP 1

Measure the length and width of the room accurately and calculate an even distribution of the first and last rows. Then draw a starting line on the floor with a chalk line.

1

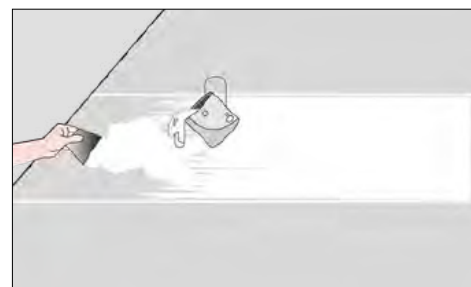

STEP 2

Spread the adhesive along the starting line. Use the correct opening time and processing time. Place the planks exactly along the perfectly straight starting line.

2



STEP 3

Starting from one side of the straight line, press the planks onto the floor. Moving towards the other side of the wall and continue to add more planks.


3



STEP 4

Measure the distance from the end of the last plank in the row to the wall. Cut the plank into the measured size. Lay the cut part and make sure the cut edge is against the wall.


4

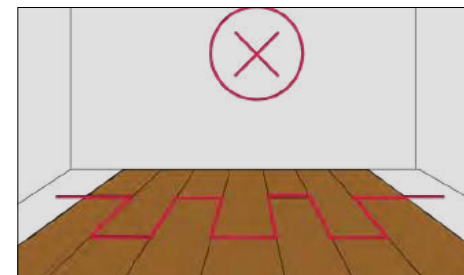

STEP 5

For a natural look, we recommend that the piece left over from the first row should not be used as the first piece of the second row to avoid creating a kind of stair case effect.


5

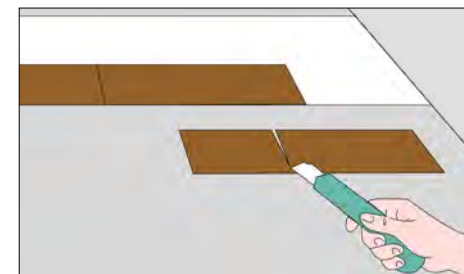

STEP 6

For the second and every subsequent row, make sure to stagger the end joints a minimum of 30 cm apart from the previous row.

6

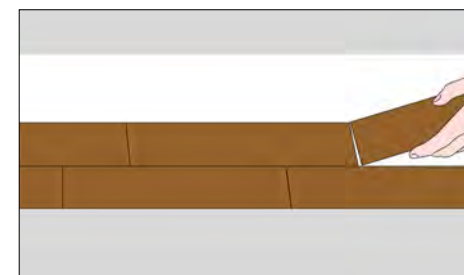

STEP 7

Place the second and each subsequent row and make sure there are no gaps between the planks.

7



STEP 8

Cut the last row along the wall or any obstacle with a utility knife. Remove any adhesive residues on the surface of the floor.

8



STEP 9

When the installation is finished, use a floor roller to ensure all the planks are firmly bonded to the floor.

9

LVT FLOORING MAINTENANCE



Always clean up spills or liquids immediately.



Sweep or vacuum daily, use only vacuums without beater bars.



Protect the floor from tracked-in dirt and grit particles by using walk-off mats at all outside entrances.






Avoid the use of rubber-backed mats, as certain rubber compounds can permanently stain vinyl.



Do not use soap based detergents or abrasive cleaners.



To avoid possible permanent indentation or damage, proper floor protection devices must be used under furniture and appliances.

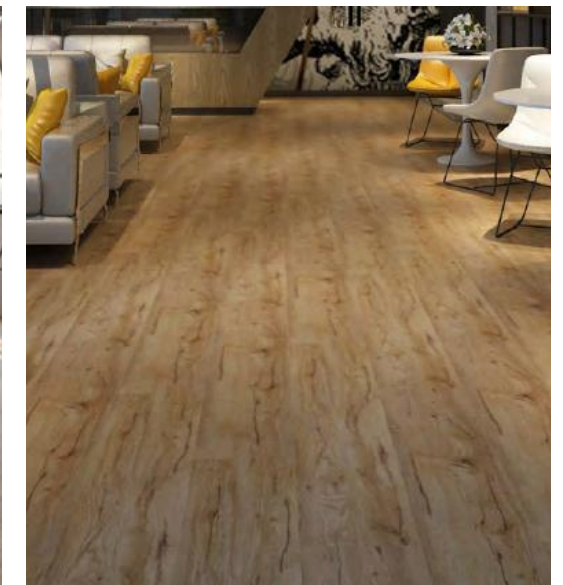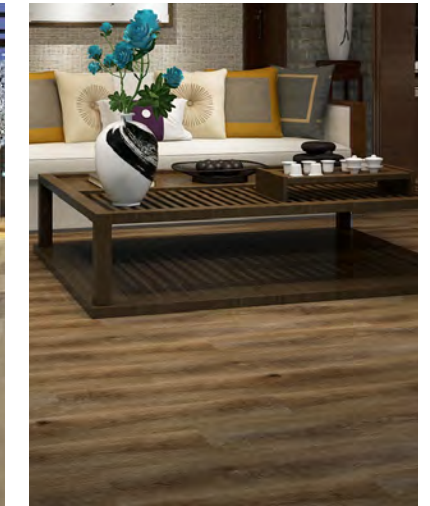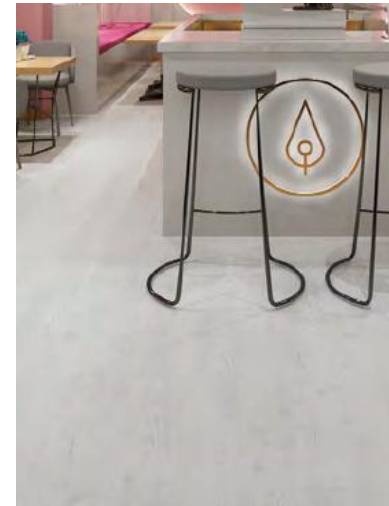



WALL PANELS

Wall panels, also known wall paneling or wallboard, work in multiples to create a continuous, uninterrupted dimensional decorative wall. As an integral part of the modern interior, it offers a variety of aesthetic and attractive interior setting solutions to perfectly meet your decoration demands and tastes.



WPC solid




WPC hollow



SPC hollow

WPC SOLID

STRUCTURE & FEATURES

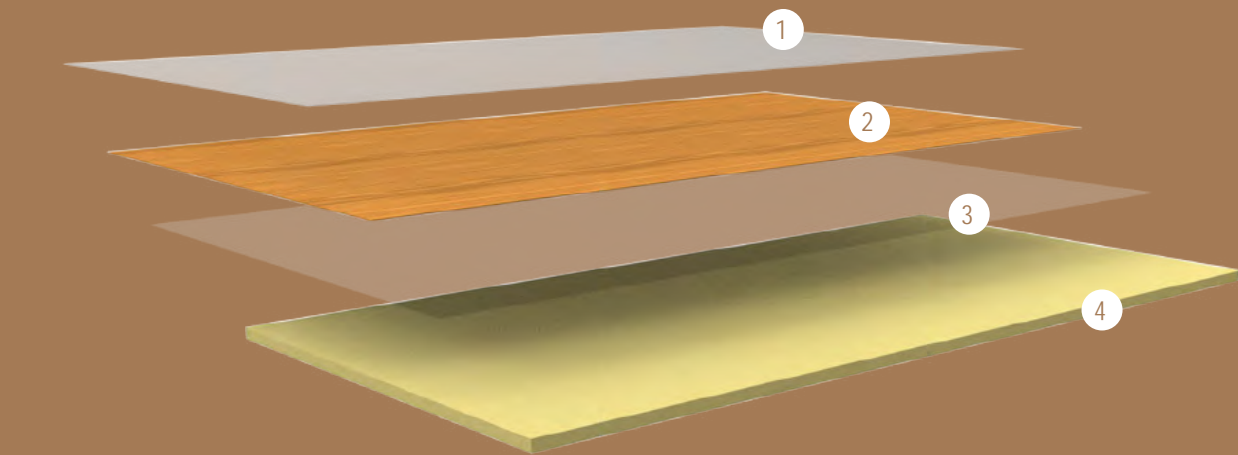


- ①

Protection Film
- ②

Decoration Film
- ③

Composite Layer
- ④

Base Layer (WPC Solid)

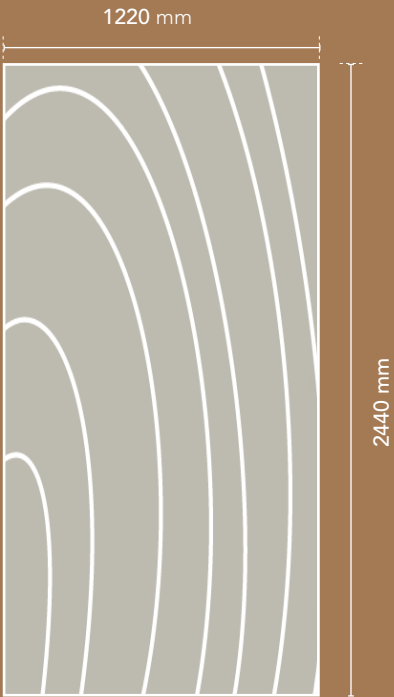


Thickness: 5/8 mm

- ✓ High density
- ✓ Durable
- ✓ Waterproof
- ✓ Fire retardant
- ✓ Easy to clean
- ✓ Eco friendly

WPC SOLID

SURFACE PATTERNS

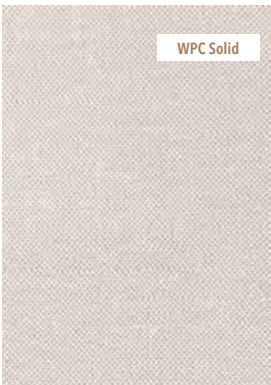


WWS-001



WWS-002



WWS-003

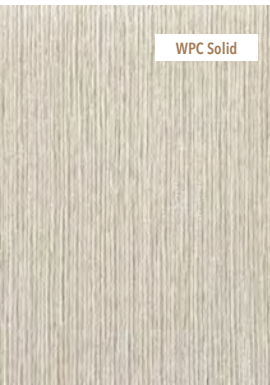

WWS-004




WWS-002



WWS-003




WWS-004

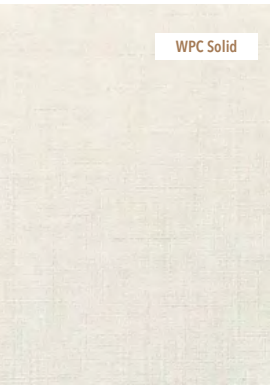

WWS-008



WWS-009

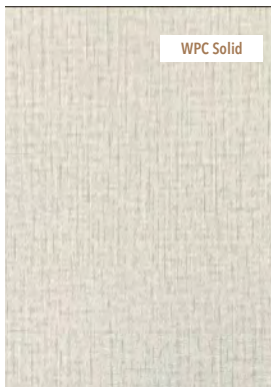

WWS-010




WWS-011




WWS-012




WWS-013

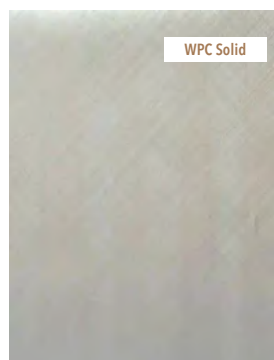

WWS-014

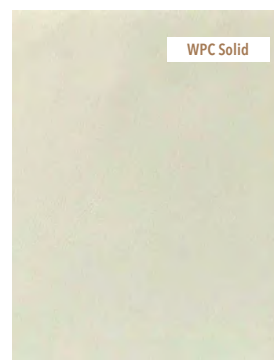


WWS-015

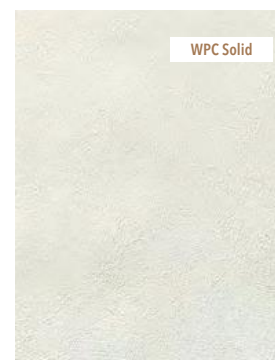


WWS-016



WWS-017

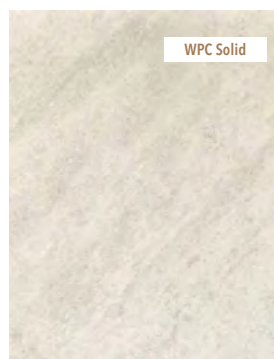


WWS-018

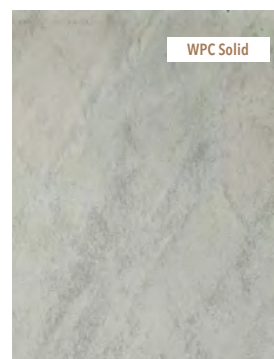


WWS-019



WWS-020

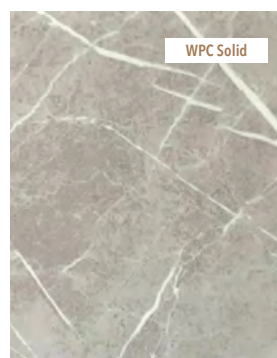

WWS-021

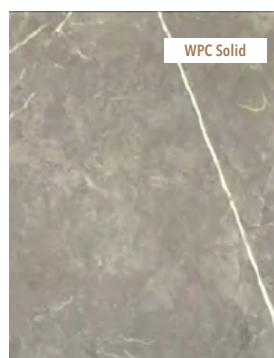

WWS-022



WWS-023



WWS-024



WWS-025



WWS-026



WWS-027




WWS-028




WPC HOLLOW

STRUCTURE & FEATURES

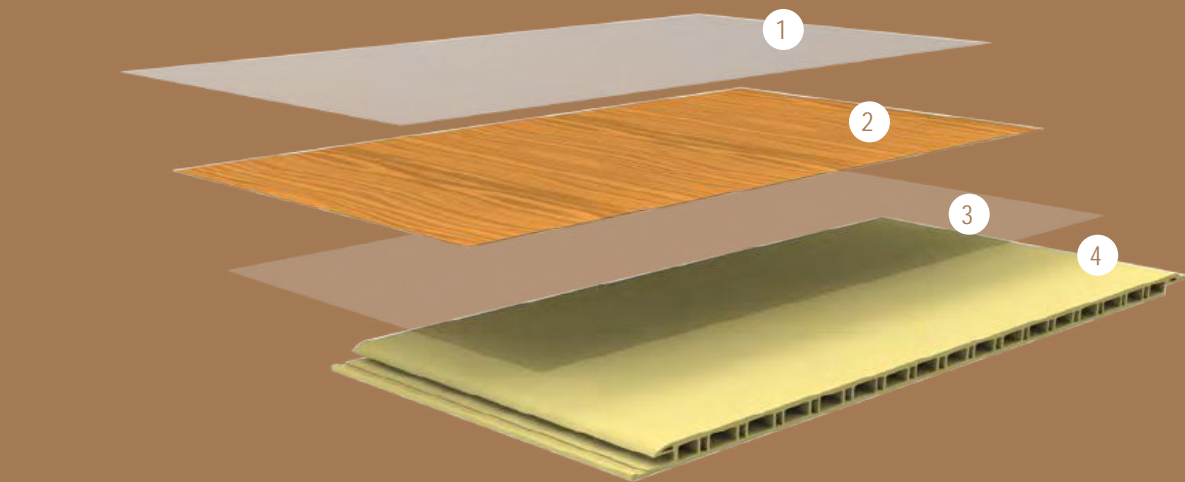

- ①
Protection Film
- ②
Decoration Film
- ③
Composite Layer
- ④
Base Layer (WPC Solid)

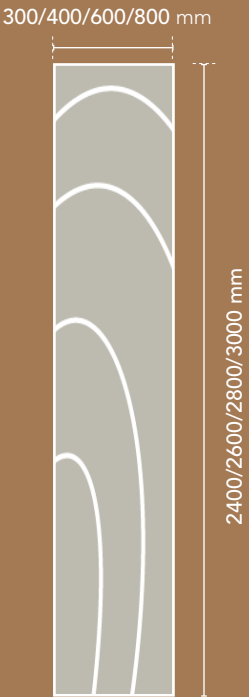

- ✓ Lightweight
- ✓ Sound insulation
- ✓ Waterproof
- ✓ Fire retardant
- ✓ Easy to clean
- ✓ Eco friendly

WPC HOLLOW

SURFACE PATTERNS

WWH-001	WWH-002	WWH-003	WWH-004
WWH-005	WWH-006	WWH-007	WWH-008
WWH-009	WWH-010	WWH-011	WWH-012
WWH-013	WWH-014	WWH-015	WWH-016
WWH-017	WWH-018	WWH-019	WWH-020
WWH-021	WWH-022	WWH-023	WWH-024




WWH-025


WWH-026

WWH-027


WWH-028



WWH-029




WWH-030




WWH-031



WWH-032



WWH-033




WWH-034




WWH-035




WWH-036




WWH-037



WWH-039



WWH-040



WWH-041



WWH-042




WWH-043




WWH-044




WWH-045




WWH-046




WWH-047




WWH-048




WWH-049




WWH-050




WWH-051




WWH-052




WWH-053




WWH-054




WWH-055




WWH-056




WWH-057




WWH-058



WWH-059



WWH-060




WWH-061




WWH-062




WWH-063




WWH-064




WWH-065




WWH-066




WWH-067




WWH-068




WWH-069




WWH-070



WWH-071




WWH-072



WWH-073




WWH-074




WWH-075




WWH-076




WWH-077




WWH-078



WWH-079




WWH-080




WWH-081




WWH-082




WWH-083



WWH-084




WWH-085



WWH-086



WWH-087




WWH-088




WWH-089




WWH-090




WWH-091




WWH-092




WWH-093




WWH-094




WWH-095



WWH-096




WWH-097



WWH-098




WWH-099




WWH-100




WWH-101




WWH-102



WWH-103



WWH-104




WWH-105




WWH-106




WWH-107




WWH-108




WWH-109




WWH-110




WWH-111




WWH-112




WWH-113




WWH-114




WWH-115



WWH-116




WWH-117




WWH-118



WWH-119




WWH-120




WWH-121



WWH-122




WWH-123




WWH-124



WWH-125




WWH-126




WWH-127




WWH-128



WWH-129



WWH-130



WWH-131




WWH-132



WWH-133



WWH-134




WWH-135



SPC HOLLOW

STRUCTURE & FEATURES

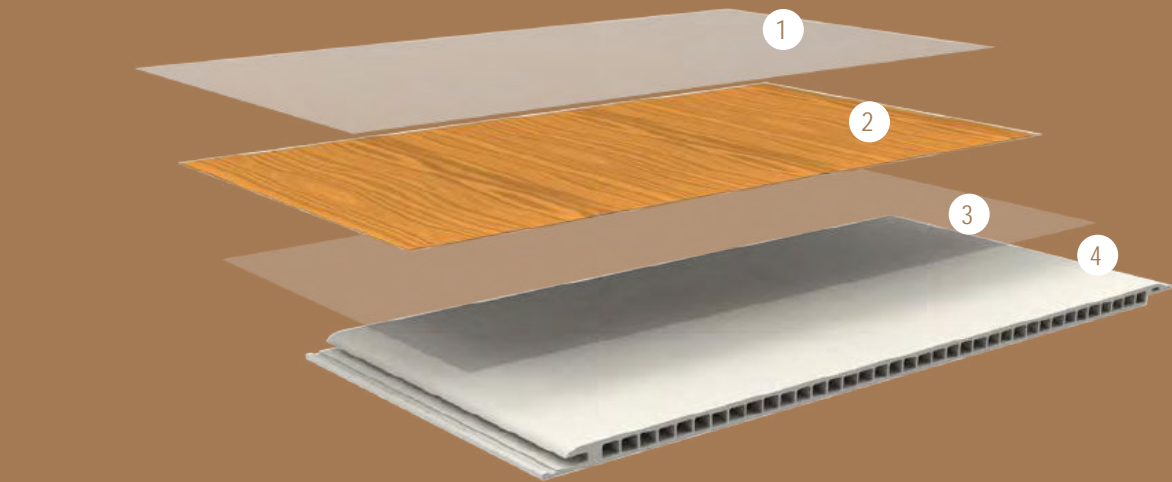


- ①

Protection Film
- ②

Decoration Film
- ③

Composite Layer
- ④


Base Layer (SPC Hollow)


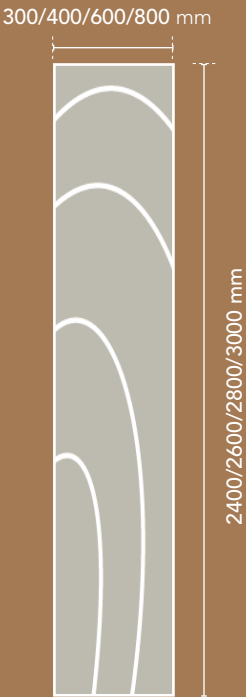



- ✓ Lightweight
- ✓ Sound insulation
- ✓ Waterproof
- ✓ Fire retardant
- ✓ Easy to clean
- ✓ Eco friendly

SPC HOLLOW


SURFACE PATTERNS

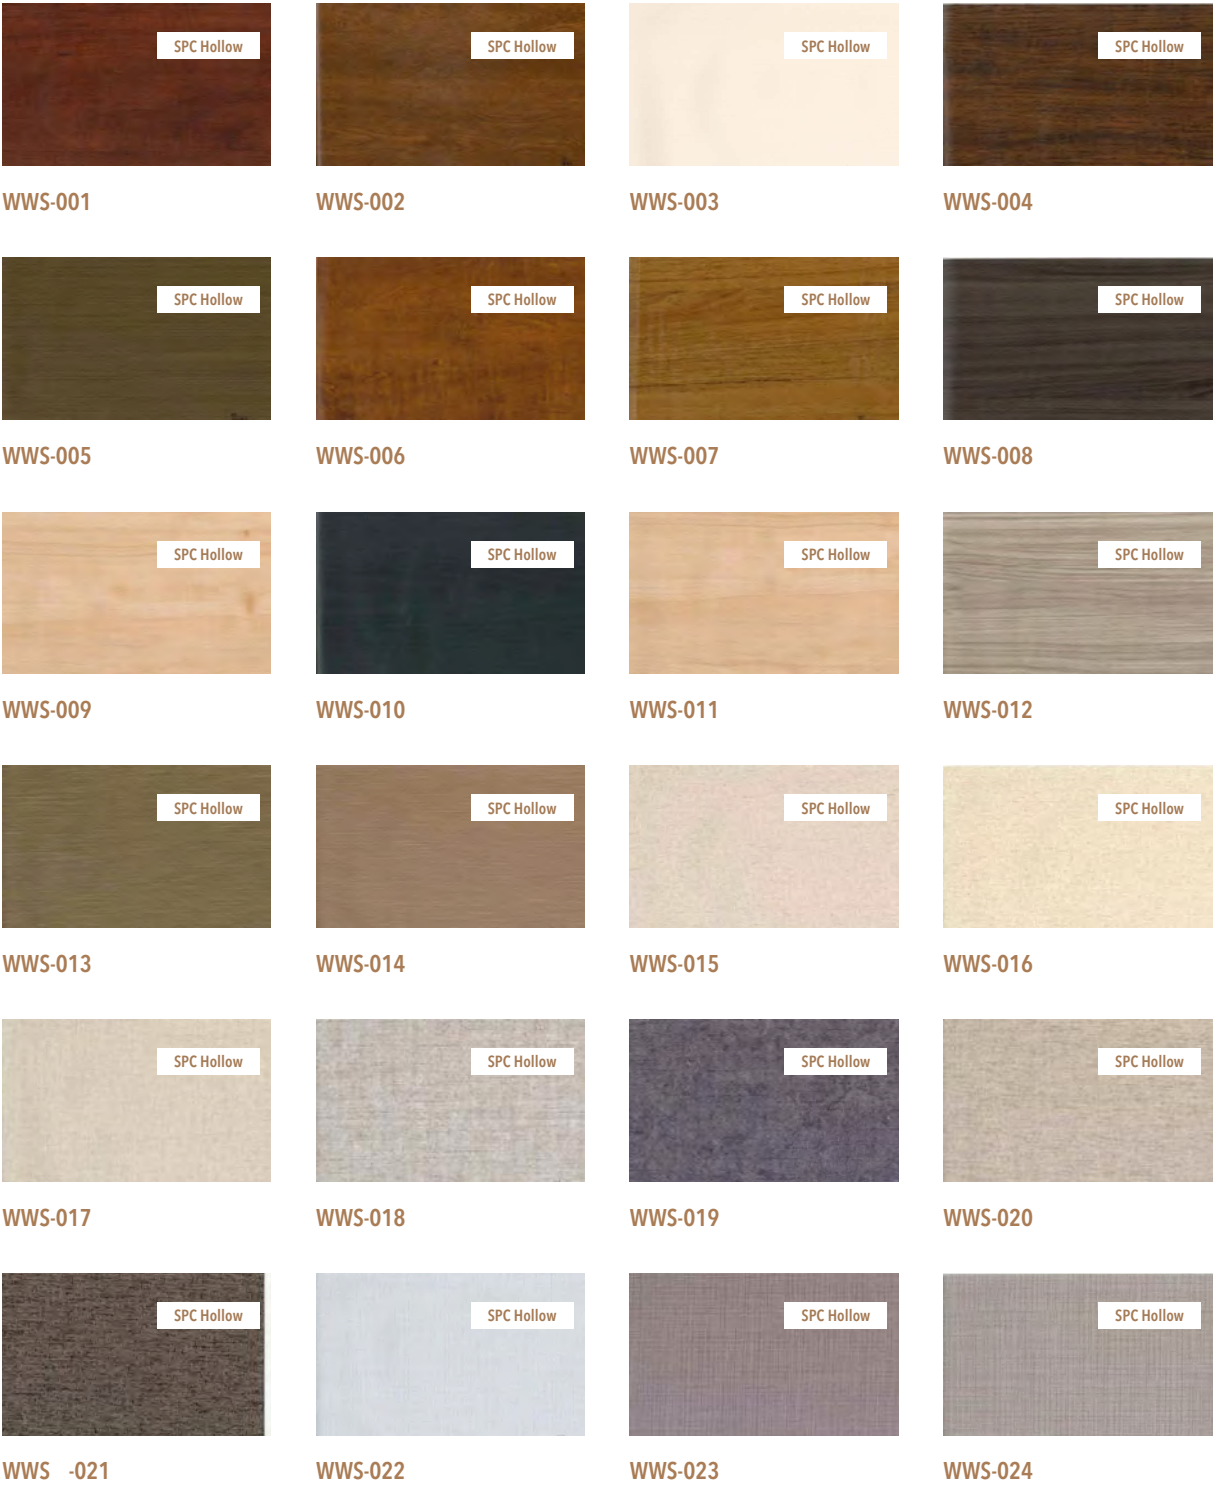

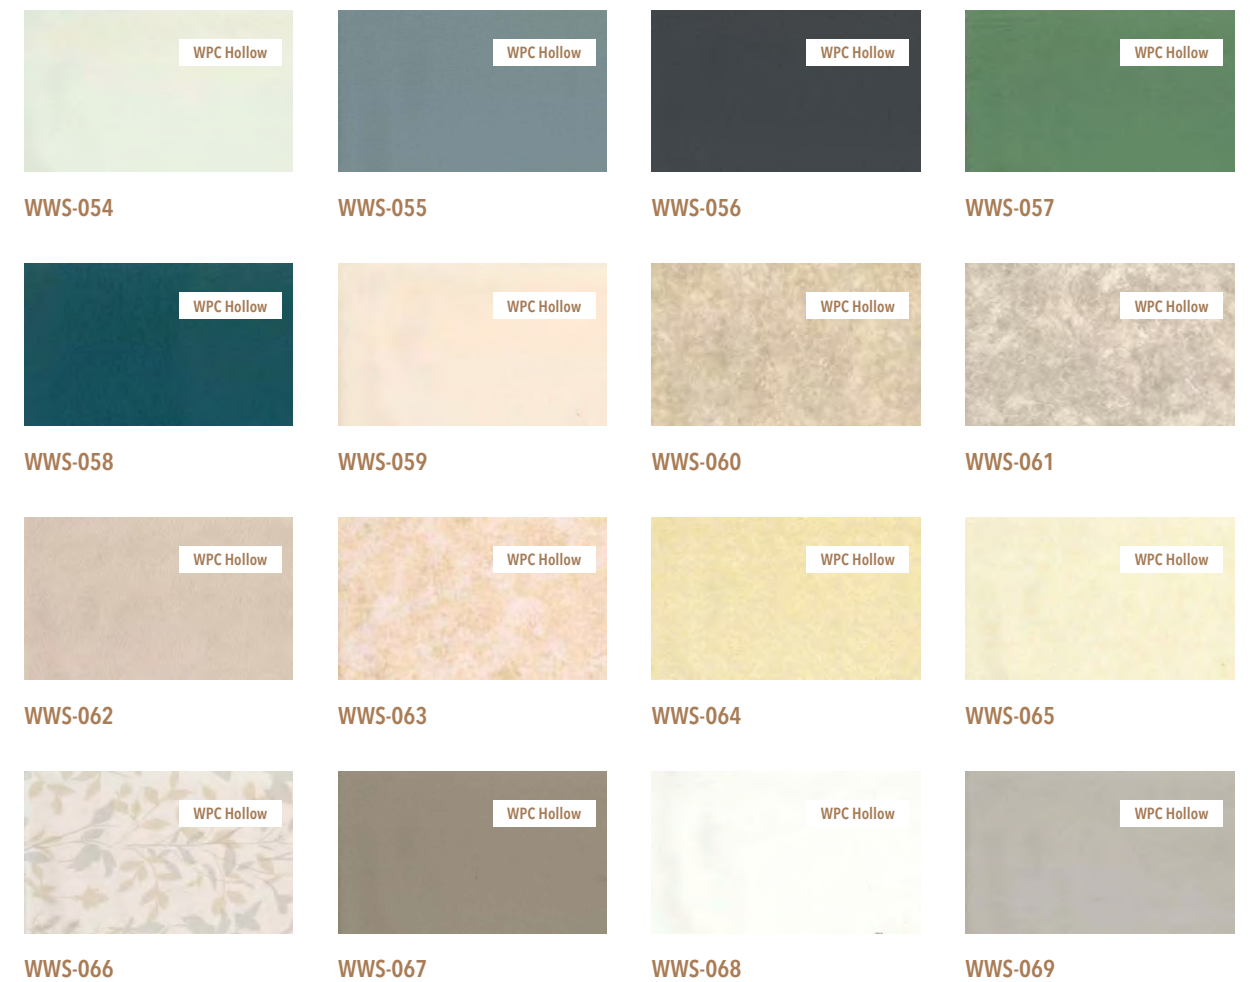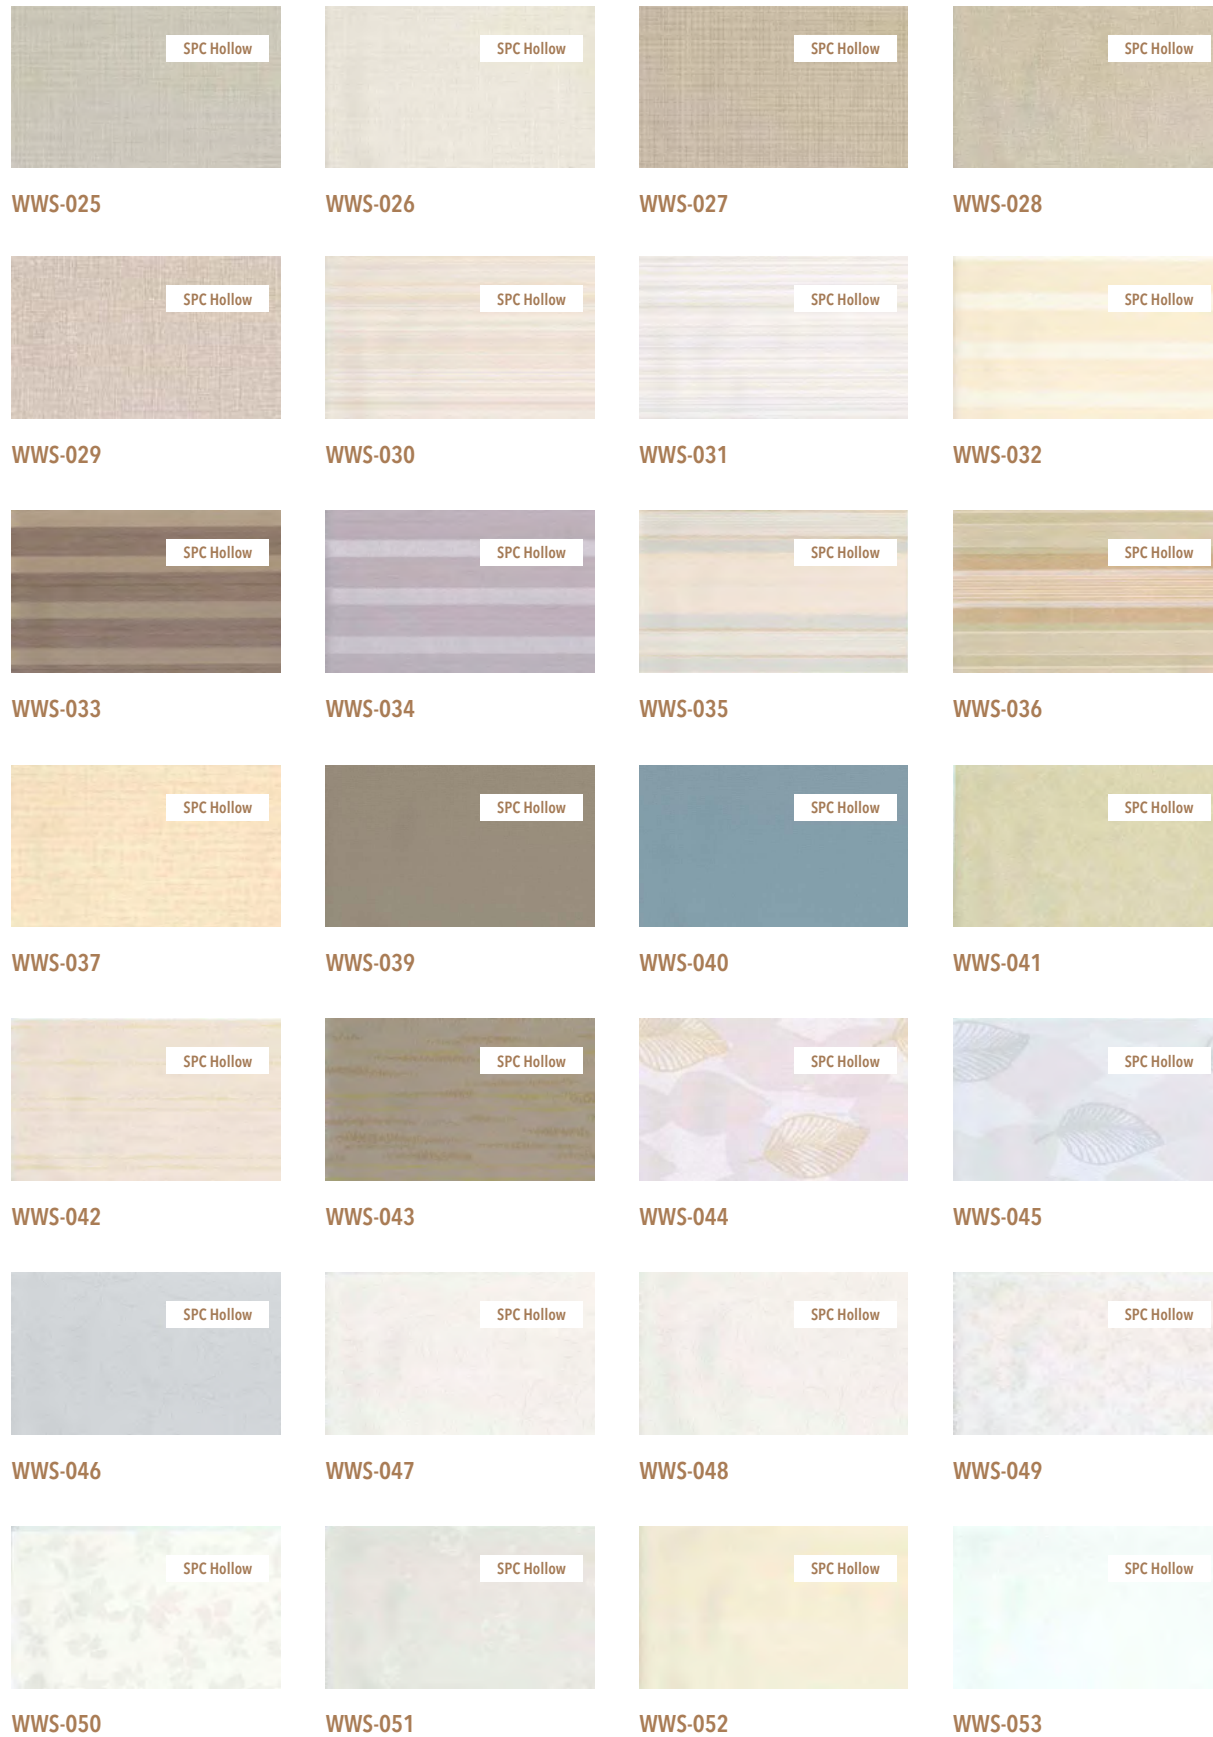




WWS-070




WWS-071




WWS-072




WWS-073




WWS-074




WWS-075




WWS-076




WWS-077




WWS-078



WWS-079




WWS-080




WWS-081




WWS-082




WWS-083




WWS-084



WWS-085




WWS-086




WWS-087




WWS-088




WWS-089




WWS-090




WWS-091




WWS-092




WWS-093




WWS-094




WWS-095



WWS-096




WWS-097



WWS-098




WWS-099




WWS-100




WWS-101




WWS-102



WWS-103




WWS-104




WWS-105




WWS-106




WWS-107




WWS-108




WWS-109




WWS-110




WWS-111




WWS-112




WWS-113




WWS-114




WWS-115




WWS-116




WWS-117




WWS-118



WWS-119




WWS-120




WWS-121



WWS-122




WWS-123




WWS-124



WWS-125




WWS-126




WWS-127




WWS-128



WWS-129



WWS-130



WWS-131



WWS-132




WWS-133



WWS-134



WWS-135

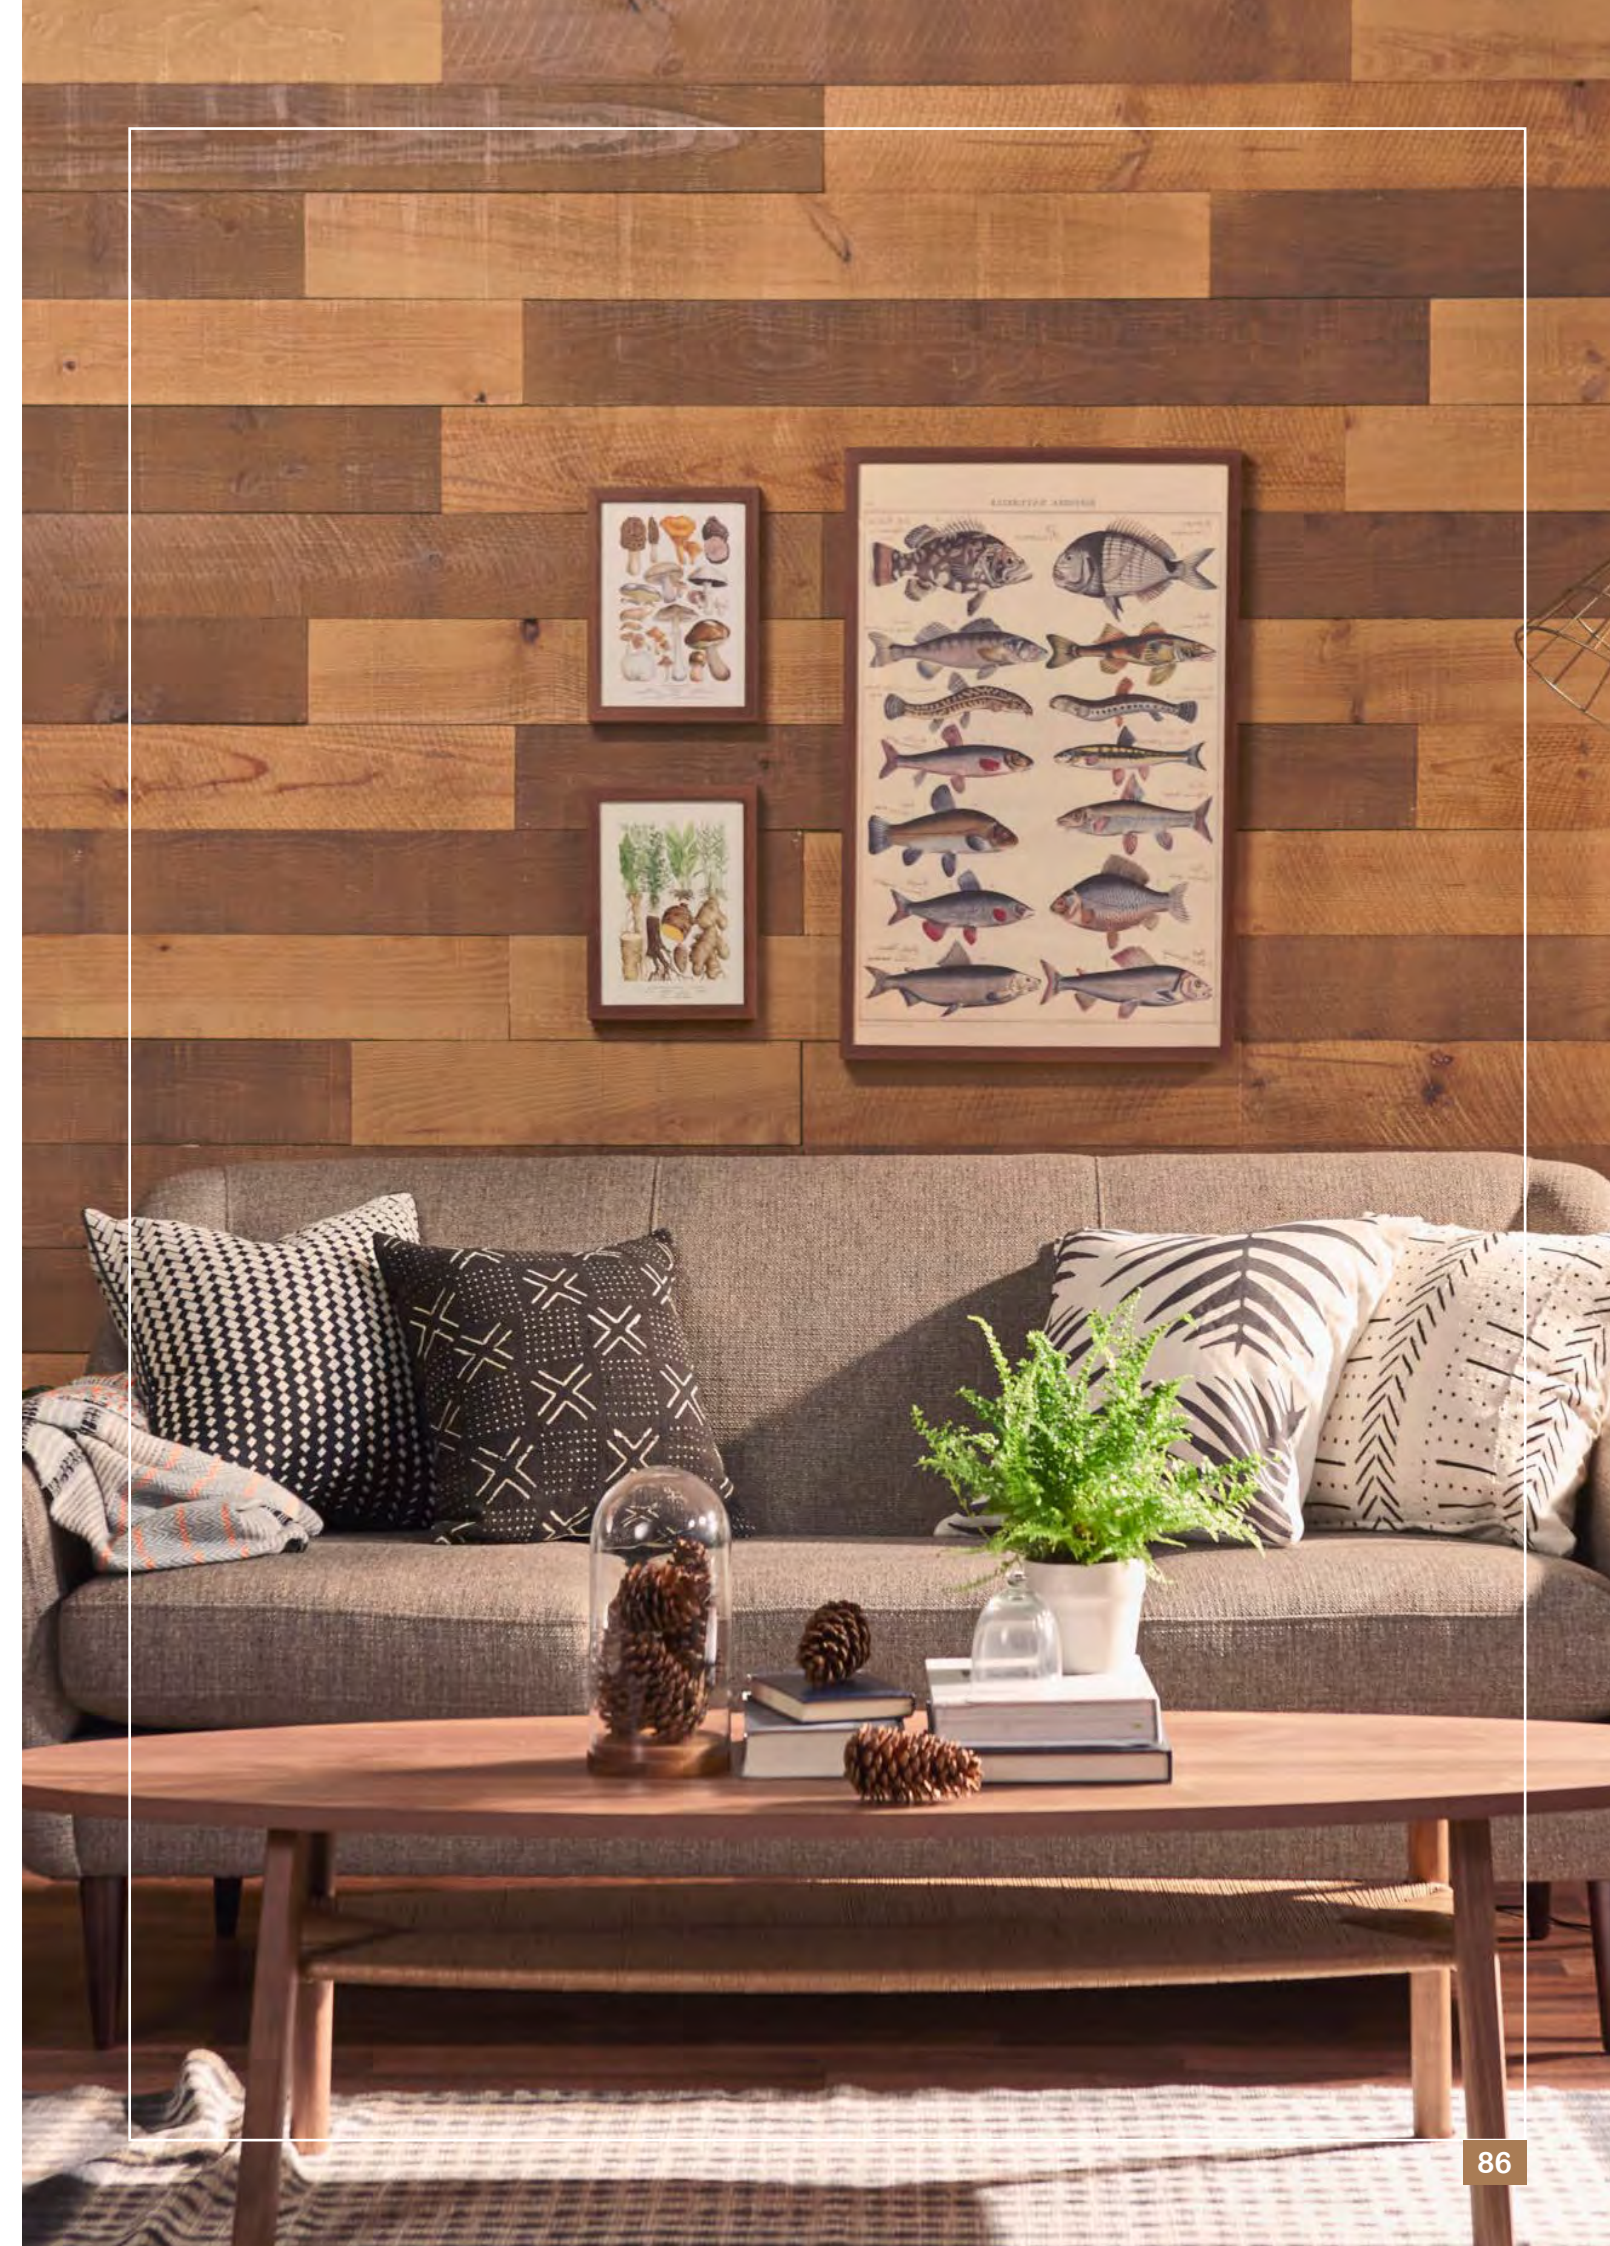











FLOORING ACCESSORIES

Flooring accessories are an essential part of every flooring project as every floor needs accessories of one sort or another to perfectly fit your selection of flooring and give a stunning effect for your project. We can offer all kinds of accessories you need to ensure your new floor goes down with style.




SPC SERIES




						
		T-MOULDING	REDUCER A	END CAP	REDUCER B	STAIR NOSE A
		FNSTM	FNSRD	FNSTM	FNSEC	FNSRD B
Thickness of flooring	mm	≥4	≥4	≥4	≥4	≥4
	in.	≥0.16	≥0.16	≥0.16	≥0.16	≥0.16
Item Size	mm	2400x45x6	2400x45x6	2400x45x8	2400x35x8	2400x45x9
	in.	94.5*1.77*0.24	94.5*1.77*0.24	94.5*1.77*0.31	94.5*1.38*0.31	94.5*1.77*0.31
CTN Packing	pcs/ctn	25	25	25	25	25
	pcs/20GP	23,400	23,400	25,200	35,100	25,200
Pallet packing	pcs/20gGP	20,800	20,800	19,200	28,800	19,200
CTN Size	mm	2420x125x80	2420x125x80	2420x125x85	2420x125x65	2420x125x85
	in.	95.3*4.92*3.15	95.3*4.92*3.15	95.3*4.92*3.35	95.3*4.92*2.56	95.3*4.92*3.35
Weight/ctn	kg	15.5	15.5	17	14.5	18
	lbs	34.1	34.1	37.4	31.9	39.6


						
		STAIR NOSE B	STAIR BOARD R	STAIR BOARD L-A	SKIRTING 60	SKIRTING 90
		FNSSNB	FNSSBR	FNSSBL-A	FNSS60	FNSS90
Thickness of flooring	mm	≥4	≥4	≥4	≥4	≥4
	in.	≥0.16	≥0.16	≥0.16	≥0.16	≥0.16
Item Size	mm	2400x72x25	2400x115x24	2400x130x25	2400x60x12	2400x90x15
	in.	94.5*2.83*0.98	94.5*4.53*0.94	94.5*5.1*0.98	94.5*2.3*0.47	94.5*3.5*0.59
CTN Packing	pcs/ctn	10	10	10	10	10
	pcs/20GP	8,280	8,400	7,500	13,700	8,800
Pallet packing	pcs/20gGP	6,400	5,760	5,280	10,240	6,720
CTN Size	mm	2420x125x100	2420x155x85	2420x155x95	2420x125x65	2420x140x90
	in.	95.3*4.92*3.94	95.3*6.10*3.35	95.3*6.1*3.74	95.3*4.92*2.55	95.3*5.5*3.5
Weight/ctn	kg	17.5	22.5	28	8.5	24
	lbs	38.5	49.5	61.7	18.7	52.9






						
		SKIRTING 80	SKIRTING 100	INSIDE CORNER MOULDING	U-TRACK	
		FNSS80	FNSS100	FNPIC	FNUT4	FNUT8
Thickness of flooring	mm	≥4	≥4	≥4	≤6	≤6
	in.	≥0.16	≥0.16	≥0.16	≤0.24	≤0.24
Item Size	mm	2400x80x12	2400x100x15	2400x28x15	2400x11x4	2400x12x8
	in.	94.5*3.15*0.47	94.5*3.94*0.59	94.5*1.10*0.59	94.5*0.43*0.16	94.5*0.47*0.31
CTN Packing	pcs/ctn	10	10	30	300	300
	pcs/20GP	10,500	7,570	28,080	174,300	107,100
Pallet packing	pcs/20gGP	7,680	5,280	23,040	174,300	107,100
CTN Size	mm	2420x125x85	2420x155x95	2420x125x90	2420x125x80	2420x125x80
	in.	95.3*4.92*3.35	95.3*6.1*3.74	95.3*4.92*3.54	95.3*4.92*3.15	95.3*4.92*3.15
Weight/ctn	kg	14.5	17.5	17	42	70
	lbs	31.9	38.6	37.4	92.4	154


				
		STAIR BOARD L-B	U-TRACK(plastic)	QUARTER ROUND
		FNSSBL-B	FNUTP	FNSQR
Thickness of flooring	mm	≥4	≤6	≥4
	in.	≥0.16	≤0.24	≥0.16
Item Size	mm	2400x110x33	2400x14x6	2400x28x15
	in.	94.5*4.3*1.3	94.5*0.55*0.24	94.5*1.10*0.59
CTN Packing	pcs/ctn	4	300	25
	pcs/20GP	4460	107,100	28,080
Pallet packing	pcs/20gGP	3328	107,100	23,040
CTN Size	mm	2420x125x80	2420x125x80	2420x125x90
	in.	95.3*4.92*3.15	95.3*4.92*3.15	95.3*4.92*3.54
Weight/ctn	kg	20	30	18.5
	lbs	44	66	40.7

WPC SERIES

							
		T-MOULDING		REDUCER A		END CAP	
		FNWT1	FNWT2	FNWR1	FNWR2	FNWEC1	FNWEC2
Thickness of flooring	mm	≤6	≤6	≤6	≤6	≤6	≤6
	in.	≤0.24	≤0.24	≤0.24	≤0.24	≤0.24	≤0.24
Item Size	mm	2400x45x7	2400x45x9	2400x45x9	2400x45x12	2400x35x9	2400x35x12
	in.	94.5*1.77*0.28	94.5*1.77*0.35	94.5*1.77*0.35	94.5*1.77*0.47	94.5*1.38*0.35	94.5*1.38*0.47
CTN Packing	pcs/ctn	25		25		25	
	pcs/20GP	26,100		25,200		35,100	
Pallet packing	pcs/20gGP	20,800		19,200		27,200	
CTN Size	mm	2420x125x80		2420x125x85		2420x125x65	
	in.	95.3*4.92*3.15		95.3*4.92*3.35		95.3*4.92*2.56	
Weight/ctn	kg	13	15	15	16.3	13.8	15
	lbs	28.6	33	33	35.9	30.4	33

							
		QUARTER ROUND		INSIDE CORNER MOULDING		L-LINE	
		FNWQR		FNWIC		FNWLL	
Thickness of flooring	mm	≤ > 6	> 6	≤6	> 6	≤6	> 6
	in.	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	> 0.24
Item Size	mm	2400x28x15	2400x28x15	2400x28x15	2400x28x15	2400x25x25	2400x35x12
	in.	94.5*1.10*0.59	94.5*1.10*0.59	94.5*1.10*0.59	94.5*1.10*0.59	94.5*0.98*0.98	94.5*1.38*0.47
CTN Packing	pcs/ctn	30		30		50	
	pcs/20GP	28,080		28,080		70,200	
Pallet packing	pcs/20gGP	23,040		23,040		57,600	
CTN Size	mm	2420x125x90		2420x125x90		2420x125x65	
	in.	95.3*4.92*3.54		95.3*4.92*3.54		95.3*4.92*2.56	
Weight/ctn	kg	20	20	17	17	27	27
	lbs	44	44	37.4	37.4	59.4	59.4

											
		STAIR NOSE A		STAIR NOSE B		BIG STAIR BOARD		SKIRTING 60		STAIR BOARD	
		FNWSNA		FNWSNB		FNWSB		FNWS60		FNWSB	
Thickness of flooring	mm	≤6	> 6	≤6	> 6	≤6	> 6	≤6	> 6	≤6	> 6
	in.	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	> 0.24
Item Size	mm	2400x55x18		2400x72x25		2200x300x24		2400x60x12		2400x115x24	
	in.	94.5*2.17*0.71		94.5*2.83*0.98		86.6*11.81*0.94		94.5*2.36*0.47		94.5*4.53*0.94	
CTN Packing	pcs/ctn	10		10		10		10		10	
	pcs/20GP	9,360		8,280		8,200		13,700		8,400	
Pallet packing	pcs/20gGP	7,680		6,400		5,280		10,240		5,760	
CTN Size	mm	2420x125x90		2420x125x100		2220x155x95		2420x125x65		2420x155x85	
	in.	95.3*4.92*3.54		95.3*4.92*3.94		87.4*6.1*3.74		95.3*4.92*2.56		95.3*6.1*3.35	
Weight/ctn	kg	16.5		18.5		50		13.5		23.5	
	lbs	36.3		40.7		110.2		29.8		51.7	

									
		SKIRTING 80		SKIRTING 90		U-TRACK(iron)		U-TRACK(plastic)	
		FNWS80		FNWS90		FNUT4	FNUT8	FNUTP	
Thickness of flooring	mm	≤6	> 6	≤6	> 6	≤6	> 6	≤6	
	in.	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	
Item Size	mm	2400x80x12		2400x90x15		2400x11x4	2400x12x8	2400x14x6	
	in.	94.5*3.15*0.47		94.5*3.54*0.59		94.5*0.43*0.16	94.5*0.47*0.31	94.5*0.55*0.24	
CTN Packing	pcs/ctn	10		10		300	300	300	
	pcs/20GP	8,280		8,320		174,300	107,100	107,100	
Pallet packing	pcs/20gGP	6,400		6,720		174,300	107,100	107,100	
CTN Size	mm	2420x125x100		2420x140x90		2420x125x80	2420x125x80	2420x125x80	
	in.	95.3*4.92*3.94		95.3*5.51*3.54		95.3*4.92*3.15	95.3*4.92*3.15	95.3*4.92*3.15	
Weight/ctn	kg	16.5		15.5		42	70	30	
	lbs	36.3		34.1		92.4	154	66	

PVC SERIES

<div><div></div><div></div><div></div><div></div><div></div></div>						
		REDUCER-A	REDUCER-B	L-LINE A	L-LINE B	T-MOULDING
		FNPRD1	FNPRD2	FNPLL1	FNPLL2	FNSRD B
Item Size	mm	2400x30x6	2400x36x8	2400x24x15	2400x20x10	FNPTM1
	in.	94.5*1.18*0.24	94.5*1.42*0.31	94.5*0.87*0.51	94.5*0.79*0.39	2400x35x7
CTN Packing	pcs/ctn	30	30	50	50	94.5*1.38*0.28
	pcs/20GP	36,720	22,500	70,200	70,200	40
Pallet packing	pcs/20gGP	32,640	15,840	57,600	57,600	46,080
CTN Size	mm	2420x125x70	2420x155x95	2420x125x65	2420x125x65	2420x125x65
	in.	95.3*4.92*2.76	95.3*6.1*3.74	95.3*4.92*2.56	95.3*4.92*2.56	95.3*4.92*2.56
Weight/ctn	kg	7	15.5	12.5	12.5	16.5
	lbs	15.4	34	27.5	27.5	36.3

<div><div></div><div></div><div></div><div></div><div></div></div>						
		T-MOULDING	STAIR NOSE A	STAIR NOSE B	SKIRTING 60	U-TRACK(plastic)
		FNPTM2	FNPSNA	FNPSNB	FNPS60	FNUTP
Thickness of flooring	mm	-	≥4	≥4	≥4	≤6
	in.	-	≥0.16	≥0.16	≥0.16	≤0.24
Item Size	mm	2400x25x6	2400x20x15	2400x50x26	2400x60x12	2400x14x6
	in.	94.5*0.98*0.24	94.5*0.79*0.59	94.5*1.97*1.02	94.5*2.36*0.47	94.5*0.55*0.24
CTN Packing	pcs/ctn	40	50	10	20	300
	pcs/20GP	56,160	70,200	35,100	17,700	107,100
Pallet packing	pcs/20gGP	46,080	57,600	28,800	13,440	107,100
CTN Size	mm	2420x125x65	2420x125x65	2420x125x80	2420x140x90	2420x125x80
	in.	95.3*4.92*2.56	95.3*4.92*2.56	95.3*4.92*3.14	95.3*5.5*3.54	95.3*4.92*3.15
Weight/ctn	kg	8.8	12.5	6.6	11.6	30
	lbs	19.4	27.5	14.5	25.6	66

ALU SERIES

<div><div></div><div></div><div></div></div>				
		L-LINE	T-MOULDING	SKIRTING
		FNALL	FNATM	FNAS55
Item Size	mm	2400x20x20	2400x22x10	2400x55x12
	in.	94.5*0.79*0.79	94.5*0.87*0.39	94.5*2.17*0.47
CTN Packing	pcs/ctn	60	60	10
	pcs/20GP	69,720	84,240	12,240
Pallet packing	pcs/20gGP	69,120	69,120	10,880
CTN Size	mm	2420x125x60	2420x125x60	2420x125x70
	in.	95.3*4.92*2.36	95.3*4.92*2.36	95.3*4.92*2.76
Weight/ctn	kg	21.5	15	7.5
	lbs	47.3	33	16.5

